


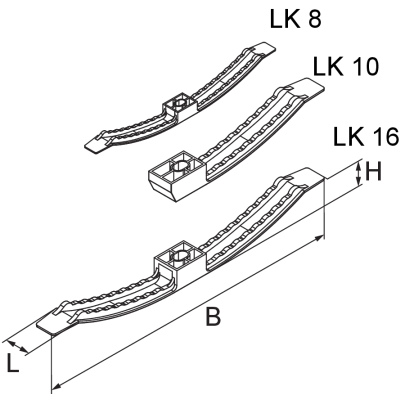


LK K
Cable clip, plastic

The cable clip LK K is used for flexible and cost-effective routing of installation cables or smaller cable bundles on ceilings. It is 16 mm high making it suitable for applications with low installation heights. It is made of halogen-free and silicone-free polyamide and is available with two temperature resistance levels: It is flame-retardant up to 750°C and up to 960°C according to the glow wire test in compliance with VDE 0471/DIN IEC 695 part 2-1. The cable clamp holds 8 to 16 cables. This information relates to NYM cable (3x1.5 mm²).

Artikel	Typ	H	B	L	Farbe	cables	T _{max}	W
LK 10 FWK	Cable clamp	15 mm	126 mm	19 mm	RAL 7030	10	960 °C	0.009 kg
LK 10 K	Cable clamp	15 mm	126 mm	19 mm	RAL 7035	10	750 °C	0.011 kg
LK 16 FWK	Cable clamp	15 mm	226 mm	19 mm	RAL 7030	16	960 °C	0.016 kg
LK 16 K	Cable clamp	15 mm	226 mm	19 mm	RAL 7035	16	750 °C	0.017 kg
LK 8 FWK	Cable clamp	14 mm	152 mm	19 mm	RAL 7030	8	960 °C	0.011 kg
LK 8 K	Cable clamp	14 mm	152 mm	19 mm	RAL 7035	8	750 °C	0.012 kg

DETAIL- UND ANWENDUNGSBILDER

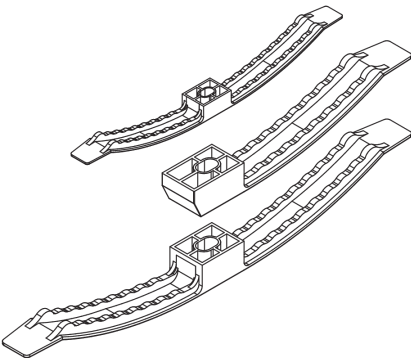

OPTIONALES ZUBEHÖR

SN, KSD

