


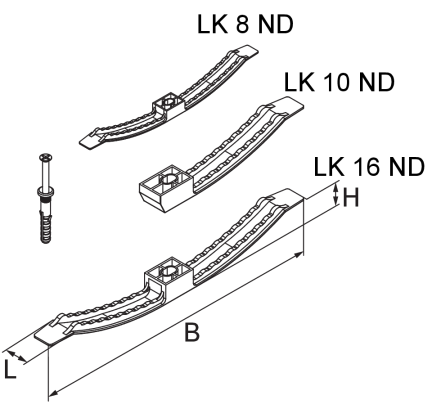

LK ND K

Cable clip, plastic, with nail anchor

The cable clip LK ND K is used for flexible and cost-effective routing of installation cables or smaller cable bundles on ceilings. It is 16 mm high making it suitable for applications with low installation heights. A nail anchor is included. The cable clamp is made of halogen-free and silicone-free polyamide and is available with two temperature resistance levels: It is flame-retardant up to 750°C and up to 960°C according to the glow wire test in compliance with VDE 0471/DIN IEC 695 part 2-1. The cable clamp holds 8 to 16 cables. This information relates to NYM cable (3x1.5 mm²).

Artikel	Typ	H	B	L	Farbe	cables	T _{max}	W
LK 10 ND FWK	Cable clamp	15 mm	126 mm	19 mm	RAL 7030	10	960 °C	0.018 kg
LK 10 ND K	Cable clamp	15 mm	126 mm	19 mm	RAL 7035	10	750 °C	0.017 kg
LK 16 ND FWK	Cable clamp	15 mm	226 mm	19 mm	RAL 7030	16	960 °C	0.027 kg
LK 16 ND K	Cable clamp	15 mm	226 mm	19 mm	RAL 7035	16	750 °C	0.026 kg
LK 8 ND FWK	Cable clamp	14 mm	152 mm	19 mm	RAL 7030	8	960 °C	0.022 kg
LK 8 ND K	Cable clamp	14 mm	152 mm	19 mm	RAL 7035	8	750 °C	0.019 kg

DETAIL- UND ANWENDUNGSBILDER

