


MKD

Mounting clamp

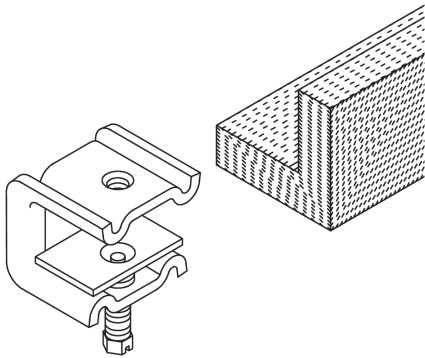

The mounting clamp MKD with riveted pressure plate is used for clamp fastening to steel beams. The MKD-L accessory can be mounted on the mounting clamp itself. This can be used, for example, to attach small mesh cable trays and cable trays protruding out into the room. Furthermore, the W clamp or the HF-EL-clamp can be mounted directly on the MKD. The maximum load is between 1.3 and 1.5 kN. The clamping range extends from 6 to 40 mm. In conjunction with a grub screw that penetrates the coating, the mounting clamp can be included in the equipotential bonding. The article is also available with lock nuts. This prevents the clamp from unintentionally coming loose. Grub screw and lock nuts must be specified separately when ordering.


Artikel	Typ	B	P _{max}	Ø	M	k	W
MKD 21	Beam clamp MKD 21	44 mm	1.50 kN	8 mm	4 Nm	6 - 21 mm	0.190 kg
MKD 21 M10	Mounting clamp	44 mm	1.50 kN	10 mm	4 Nm	6 - 21 mm	0.173 kg
MKD 21 M6	Mounting clamp	44 mm	1.50 kN	6 mm	4 Nm	6 - 21 mm	0.180 kg
MKD 40	Beam clamp MKD 40	44 mm	1.30 kN	8 mm	4 Nm	20 - 40 mm	0.204 kg

Artikel	Typ	B	P _{max}	Ø	M	k	W
MKD 21E	Beam clamp MKD 21 E	44 mm	1.50 kN	8 mm	4 Nm	6 - 21 mm	0.190 kg
MKD 21E M10	Mounting clamp	44 mm	1.50 kN	10 mm	4 Nm	6 - 21 mm	0.190 kg
MKD 21E M6	Mounting clamp	44 mm	1.50 kN	6 mm	4 Nm	6 - 21 mm	0.165 kg
MKD 40E	Beam clamp MKD 40 E	44 mm	1.30 kN	8 mm	4 Nm	20 - 40 mm	0.193 kg

Artikel	Typ	B	P _{max}	Ø	M	k	W
MKD 21E4	Beam clamp MKD 21 E4	44 mm	1.50 kN	8 mm	4 Nm	6 - 21 mm	0.190 kg
MKD 40E4	Beam clamp MKD 40 E	44 mm	1.30 kN	8 mm	4 Nm	20 - 40 mm	0.193 kg



DETAIL- UND ANWENDUNGSBILDER

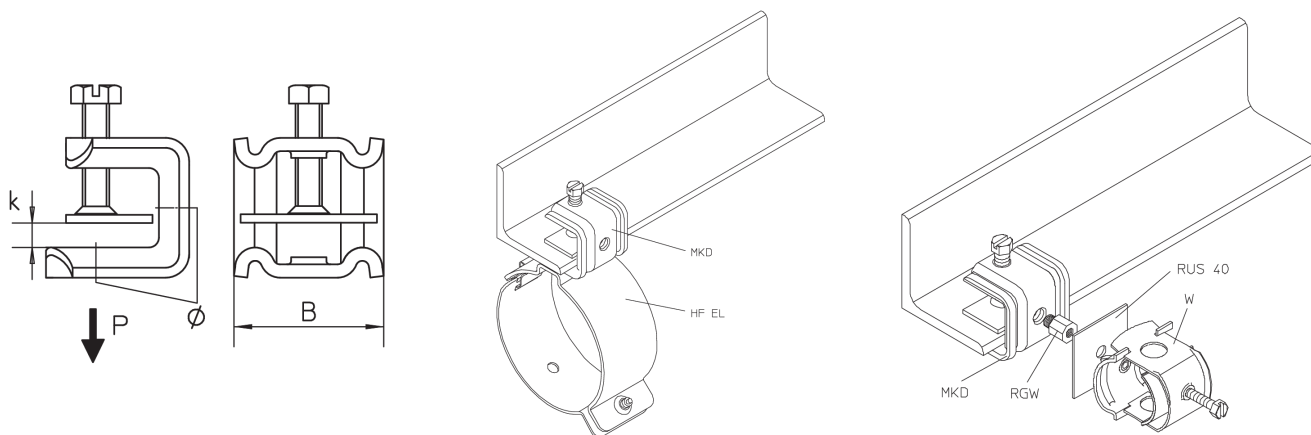

OPTIONALES ZUBEHÖR

MKD-L, RGW

