




PENTAFLEX® ABS V Floor/Floor

Sealing formwork element as interlocked joint

The component PENTAFLEX® ABS V Floor/Floor is a formwork element that is used to create waterproof construction joints in the floor-to-floor connection area of reinforced concrete components. The ABS-R version with a shortened, stiffening lattice girder construction is suitable for interlocked joint versions according to DIN EN 1992-1-1/NA (EC2). The formwork element is made of DC04 steel and has been verified as watertight up to 5.0 bar. It is 2400 mm long and 140 to 590 mm high. Other length dimensions, e.g. short or conical pieces, are also available on request.

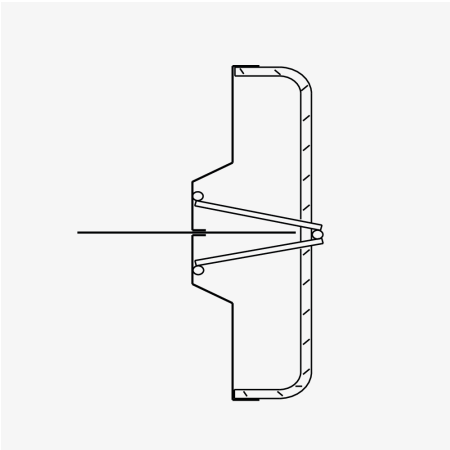

Artikel	Typ	H	W
111800022091	Penta ABS V 140 200 2.4 NEW	140-200 mm	2.610 kg
111800022092	Penta ABS V 210 250 2.4 NEW	210-250 mm	2.740 kg
111800022093	Penta ABS V 260 300 2.4 NEW	260-300 mm	2.960 kg
111800022094	Penta ABS V 310 350 2.4 NEW	310-350 mm	3.340 kg
111800022095	Penta ABS V 360 400 2.4 NEW	360-400 mm	3.590 kg
111800022096	Penta ABS V 410 500 2.4 NEW	410-500 mm	4.080 kg
111800022097	Penta ABS V 510 590 2.4 NEW	510-590 mm	5.460 kg



Europäische Technische Bewertung: ETA-15/0003

