




PENTAFLEX® Module



Water impermeable reinforcement connection

The PENTAFLEX® Module in combination with FERBOX® rebend connections is used wherever building components have to be joined together with a frictional and waterproof connection, especially in parts of buildings below ground level such as underground garages and basements. The PENTAFLEX® Module consists of the 60 mm high PENTAFLEX KB® joint sheet, a reinforcement box as an installation aid and foam filler strips for recesses. The module is available in lengths of 800 or 1200 mm. Other lengths are available on request.

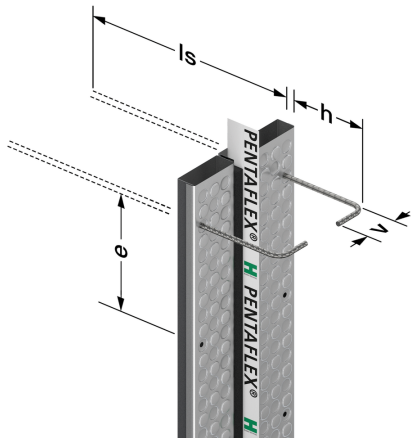

Artikel	Typ	W
110400022083	Penta module	2.090 kg
110400024200	Penta Modul 0.80	1.400 kg

DETAIL- UND ANWENDUNGSBILDER

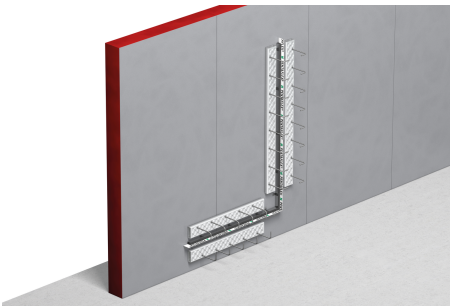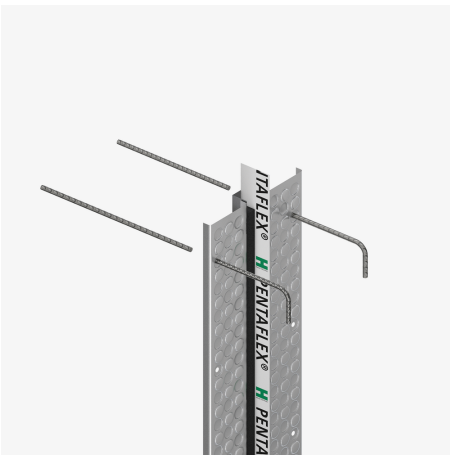

OPTIONALES ZUBEHÖR

FERBOX® Type E01, FERBOX® Type E02, FERBOX® Type E03, FERBOX® Type EE



Allgemeines bauaufsichtliches Prüfzeugnis: P-5120/231/09 MPA-BS

