




PENTAFLEX® OBS G-S Floor

In-situ concrete crack control element with joint sheet (smooth joint)

PENTAFLEX® OBS G-S Floor floor panel elements for smooth joints (according to EC 2) consist of PENTAFLEX KB® joint sheets with wings made of galvanised sheet steel. They come in lengths of 2500 mm as standard. The standard installation dimension is 80 - 1000 mm.

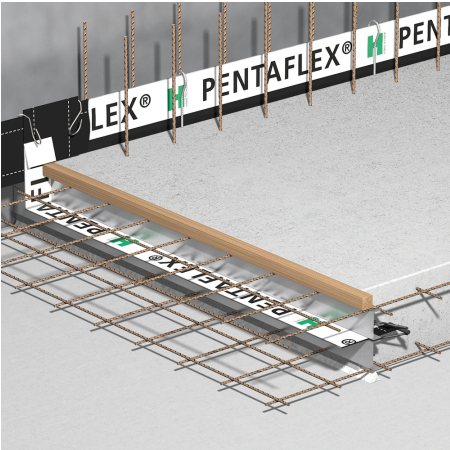

Artikel	Typ	H	L	W
110700020316	Penta OBS X BD 610 700	610-700 mm	2500 mm	5.410 kg
110700020317	Penta OBS X BD 810 900	810-900 mm	2500 mm	10.390 kg
110700020318	Penta OBS X BD 910 1000	910-1000 mm	2500 mm	10.920 kg
110700020320	Penta OBS X BD 710 800	710-800 mm	2500 mm	9.870 kg
110700020325	Penta OBS X BD 260 300	260-300 mm	2500 mm	2.820 kg
110700020326	Penta OBS X BD 310 350	310-350 mm	2500 mm	3.260 kg
110700020327	Penta OBS X BD 360 400	360-400 mm	2500 mm	3.500 kg
110700020328	Penta OBS X BD 80 200	80-200 mm	2500 mm	2.380 kg
110700020329	Penta OBS X BD 510 600	510-600 mm	2500 mm	4.920 kg
110700020330	Penta OBS X BD 210 250	210-250 mm	2500 mm	2.600 kg
110700020332	Penta OBS X BD 410 500	410-500 mm	2500 mm	3.990 kg



General building authority test certificate: P-5120/231/09 MPA-BS



Europäische Technische Bewertung: ETA-15/0003

