


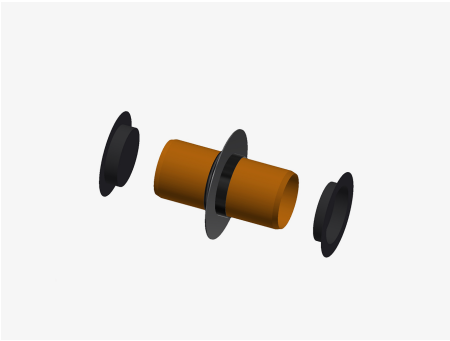

PENTAFLEX® Protective Tube PVC

Waterproof wall lead-through

PENTAFLEX® Protective Tube PVC is a waterproof wall lead-through for cast-in-place or precast walls. It consists of a PVC pipe. The pipe diameter DN is 110 - 250 mm. The bushing is suitable for walls 240 - 500 mm thick and a water pressure of up to 5.0 bar. From DN 200 upwards, polystyrene plugs are used instead of covers.

Artikel	Typ	W
111000004508	Frohr KG 110 240	0.512 kg
111000004519	Frohr KG 125 240	0.708 kg
111000004532	Frohr KG 160 240	1.048 kg
111000004543	Frohr KG 200 240	1.582 kg
111000004556	Frohr KG 250 240	2.474 kg
111000004567	Frohr KG 315 240	4.880 kg
111000004573	Frohr KG 400 240	6.112 kg
111000004579	Frohr KG 500 240	7.180 kg

