


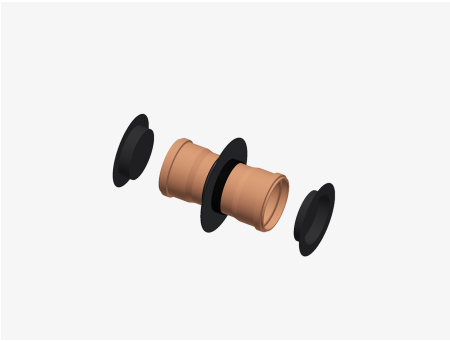

PENTAFLEX® Transwand DM-PP

Waterproof wall lead-through

PENTAFLEX® Transwand DM-PP is a waterproof wall lead-through for cast-in-place or precast walls. It consists of a PP pipe and is available with a double sleeve. The pipe diameter DN is 110 - 160 mm. The bushing is suitable for walls 240 - 500 mm thick and a water pressure of up to 5.0 bar.

Artikel	Typ	W
110900013045	Twand PP 110 240 DM	0.519 kg
110900013046	Twand PP 110 250 DM	0.530 kg
110900013047	Twand PP 110 300 DM	0.586 kg
110900013049	Twand PP 110 350 DM	0.642 kg
110900013051	Twand PP 110 360 DM	0.653 kg
110900013052	Twand PP 110 365 DM	0.659 kg
110900013054	Twand PP 110 400 DM	0.698 kg
110900013056	Twand PP 110 500 DM	0.810 kg
110900013073	Twand PP 125 240 DM	0.663 kg
110900013074	Twand PP 125 250 DM	0.680 kg
110900013077	Twand PP 125 350 DM	0.852 kg
110900013081	Twand PP 125 400 DM	0.938 kg
110900013103	Twand PP 160 350 DM	1.819 kg
110900013107	Twand PP 160 400 DM	2.036 kg
110900013109	Twand PP 160 500 DM	2.470 kg

