


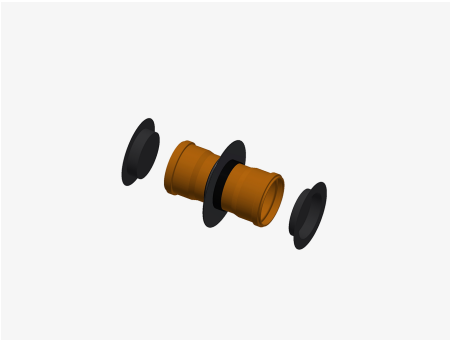

# PENTAFLEX® Transwand DM PVC

Waterproof wall lead-through

PENTAFLEX® Transwand DM PVC is a waterproof wall lead-through for cast-in-place or precast walls. It consists of a PVC pipe and is available with a double sleeve. The pipe diameter DN is 110 mm. The bushing is suitable for walls 240 - 500 mm thick and a water pressure of up to 5.0 bar.

| Artikel      | Typ                 | W        |
|--------------|---------------------|----------|
| 110900012969 | Twand KG 110 240 DM | 0.557 kg |
| 110900012970 | Twand KG 110 250 DM | 0.957 kg |
| 110900012971 | Twand KG 110 300 DM | 0.634 kg |
| 110900012972 | Twand KG 110 350 DM | 0.698 kg |
| 110900012973 | Twand KG 110 360 DM | 0.711 kg |
| 110900012974 | Twand KG 110 365 DM | 0.717 kg |
| 110900012975 | Twand KG 110 400 DM | 0.762 kg |
| 110900012976 | Twand KG 110 500 DM | 0.890 kg |

