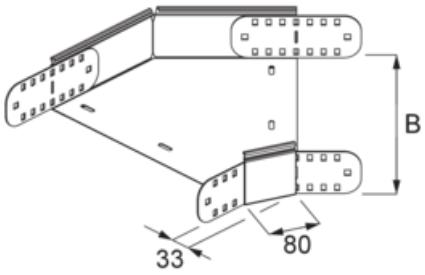

RB45 85

Cable tray bend, height = 85 mm

The cable tray bend RB45 85 allows the direction of cable routing to be changed horizontally by 45°. They are suitable for cable trays with sides 85 mm high and have integrated side connectors. The bend is inserted into the cable tray and bolted in place using a VB floor connector. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

The magnetic shielding attenuation is 22 dB without the cover and 27 dB with the cover.

Steel, pre-galvanised/Sendzimir process

Article	H	B	direction	W	G
RB45 85-10S Cable tray bend 45°	85 mm	100 mm	horizontal	45°	0.948 kg
RB45 85-20S Cable tray bend 45°	85 mm	200 mm	horizontal	45°	1.233 kg
RB45 85-30S Cable tray bend 45°	85 mm	300 mm	horizontal	45°	1.717 kg
RB45 85-40S Cable tray bend 45°	85 mm	400 mm	horizontal	45°	2.168 kg
RB45 85-50S Cable tray bend 45°	85 mm	500 mm	horizontal	45°	2.699 kg
RB45 85-60S Cable tray bend 45°	85 mm	600 mm	horizontal	45°	3.315 kg

Steel, hot-dip galvanised

Article	H	B	direction	W	G
RB45 85-10F Cable tray bend 45°	85 mm	100 mm	horizontal	45°	1.018 kg
RB45 85-20F Cable tray bend 45°	85 mm	200 mm	horizontal	45°	1.323 kg
RB45 85-30F Cable tray bend 45°	85 mm	300 mm	horizontal	45°	1.841 kg
RB45 85-40F Cable tray bend 45°	85 mm	400 mm	horizontal	45°	2.324 kg
RB45 85-50F Cable tray bend 45°	85 mm	500 mm	horizontal	45°	2.892 kg

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

Article	H	B	direction	W	G
RB45 85-60F Cable tray bend 45°	85 mm	600 mm	horizontal	45°	3.551 kg

H: height
B: width
direction: Direction change
W: Angle
G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES

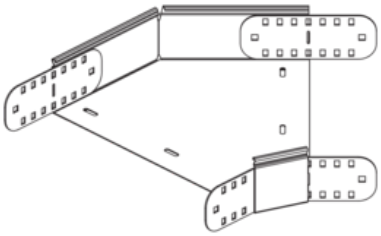

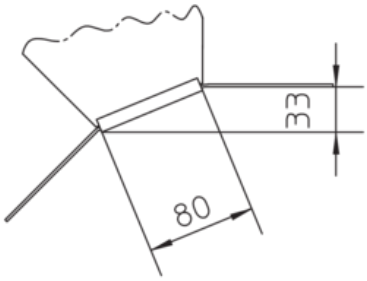

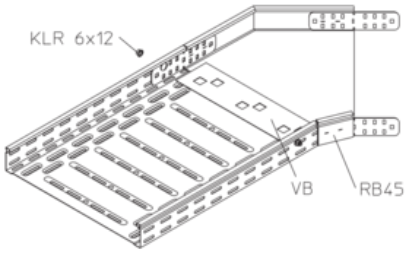

OPTIONAL ACCESSORIES

RBD45, RBDR45, VB, RTRV 85

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved