


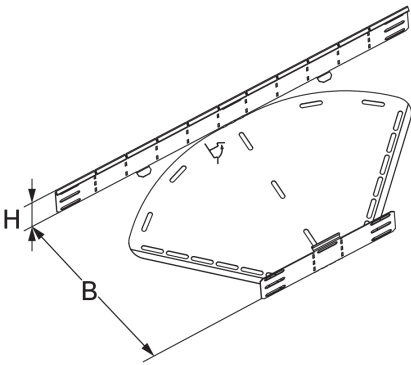


RBV 85


Cable tray bend, variable, height = 85 mm

The variable cable tray bend RBV 85 allows the direction of cable routing to be changed horizontally by 0 to 90° and - mounted as a surface-mounted branch - a change in direction from 0° to 45°. They are suitable for cable trays R(G)(S) with sides 85 mm high and have integrated connectors and slots for fastening separating strips or brackets. The edges at the head of the variable cable tray bend are folded over to protect the cable. The variable cable tray bend is packed flat when delivered. To assemble the bend, fold up the inside and outside sections. Take care to align the head correctly. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

Artikel	Typ	H	B	W	W
RBV 85-10S	Cable tray bend RB 35-10S	85 mm	100 mm	var.	0.437 kg
RBV 85-20S	Cable tray bend RB 35-10S	85 mm	200 mm	var.	0.732 kg
RBV 85-30S	Cable tray bend RB 35-10S	85 mm	300 mm	var.	1.450 kg
RBV 85-40S	Cable tray bend RB 35-10S	85 mm	400 mm	var.	2.080 kg
RBV 85-50S	Cable tray bend RB 35-10S	85 mm	500 mm	var.	3.503 kg
RBV 85-60S	Cable tray bend RB 35-10S	85 mm	600 mm	var.	4.663 kg

DETAIL- UND ANWENDUNGSBILDER

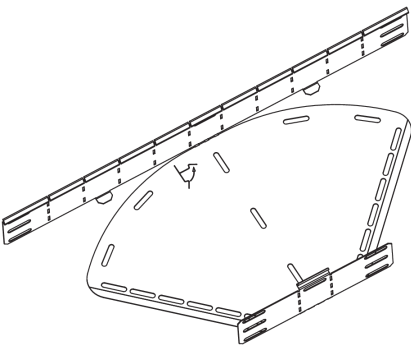

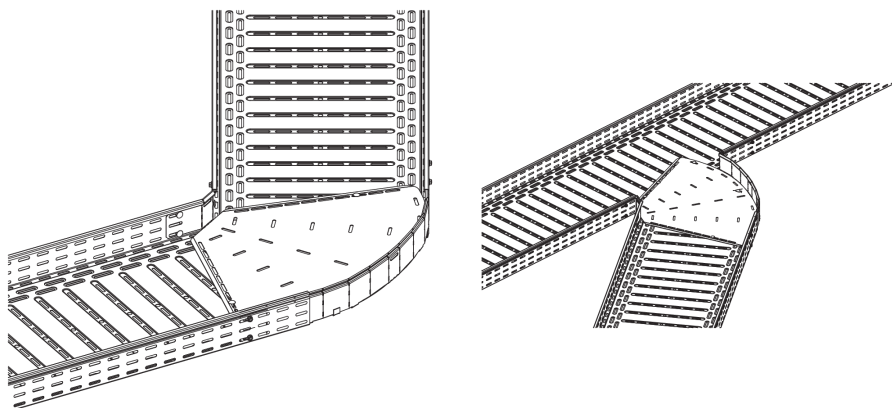

OPTIONALES ZUBEHÖR

RBVD, RBVDR, RTRV 85

