


RM
DIN 582 ring nuts

RM ring nuts according to DIN 582 are used to securely fix particularly heavy loads mainly during transport. They are available in threads M8 to M20 and are made of galvanised or untreated steel. They can bear loads of up to 16 kN.

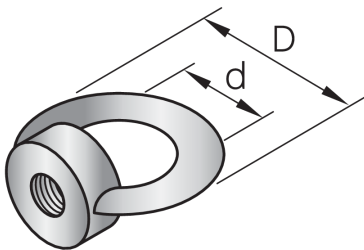

Artikel	Typ	W
RM10 GV	ring nuts, DIN 582, M10	0.091 kg
RM10 R	ring nuts, DIN 582, M10	0.091 kg
RM12 GV	ring nuts, DIN 582, M12	0.150 kg
RM12 R	ring nuts, DIN 582, M12	0.150 kg
RM16 GV	ring nuts, DIN 582, M16	0.251 kg
RM16 R	ring nuts, DIN 582, M16	0.251 kg
RM20 GV	ring nuts, DIN 582, M20	0.377 kg
RM20 R	ring nuts, DIN 582, M20	0.377 kg
RM8 GV	ring nuts, DIN 582, M8	0.047 kg
RM8 R	ring nuts, DIN 582, M8	0.047 kg

DETAIL- UND ANWENDUNGSBILDER



