


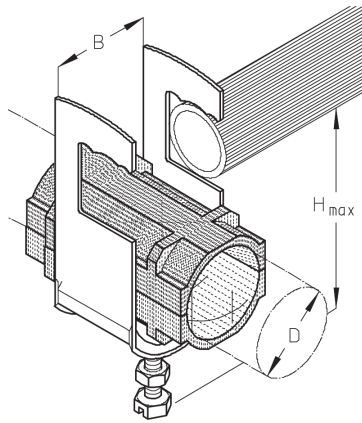

RU-HW

Cable clamp for fastening to round and flat profiles

The HF cable clamp RU-HW with full-surface pressure trough made of galvanised steel and plastic half troughs made of polystyrene can route fibre-optic/high-frequency cables with a maximum diameter of 1 5/8 inches. It is suitable for fastening to round and flat profiles made from material max. 22 mm thick. We provide components in various materials and surface finishes to ensure that various requirements for different areas of application are met.

Artikel	Typ	H _{max}	B	D	D	cables	W
20 RU-HW-E	HF cable clamp 20 RU-HW-VA	53 mm	20 mm	17 mm	1/2 inch	1	0.008 kg
20/2 RU-HW-E	HF cable clamp 20/2 RU-HW-VA	73 mm	20 mm	17 mm	1/2 inch	2	0.076 kg
20/3 RU-HW-E	HF cable clamp 20/3 RU-HW-VA	93 mm	20 mm	17 mm	1/2 inch	3	0.000 kg
32 RU-HW-E	HF cable clamp 32 RU-HW-VA	68 mm	32 mm	29 mm	7/8 inch	1	0.103 kg
32/2 RU-HW-E	HF cable clamp 32/2 RU-HW-VA	102 mm	32 mm	29 mm	7/8 inch	2	0.155 kg
32/3 RU-HW-E	HF cable clamp 32/3 RU-HW-VA	136 mm	32 mm	29 mm	7/8 inch	3	0.208 kg
44/2 RU-HW-E	HF cable clamp 44/2 RU-HW-VA	129 mm	44 mm	39 mm	1 1/4 inch	2	0.215 kg
44/3 RU-HW-E	HF cable clamp 44/3 RU-HW-VA	176 mm	44 mm	39 mm	1 1/4 inch	3	0.297 kg
56/2 RU-HW-E	HF cable clamp 56/2 RU-HW-VA	164 mm	56 mm	51 mm	1 5/8 inch	2	0.287 kg
56 RU-HW-E	HF cable clamp 56 RU-HW-VA	106 mm	56 mm	51 mm	1 5/8 inch	1	0.182 kg
44 RU-HW-E	HF cable clamp 44 RU-HW-VA	83 mm	44 mm	39 mm	1 1/4 inch	1	0.141 kg

Artikel	Typ	H _{max}	B	D	D	cables	W
20 RU-HW	HF cable clamp 20 RU-HW	53 mm	20 mm	17 mm	1/2 inch	1	0.053 kg
20/2 RU-HW	HF cable clamp 20/2 RU-HW	73 mm	20 mm	17 mm	1/2 inch	2	0.079 kg
20/3 RU-HW	HF cable clamp 20/3 RU-HW	93 mm	20 mm	17 mm	1/2 inch	3	0.100 kg
32 RU-HW	HF cable clamp 32 RU-HW	68 mm	32 mm	29 mm	7/8 inch	1	0.102 kg
32/2 RU-HW	HF cable clamp 32/2 RU-HW	102 mm	32 mm	29 mm	7/8 inch	2	0.157 kg
44/2 RU-HW	HF cable clamp 44/2 RU-HW	129 mm	44 mm	39 mm	1 1/4 inch	2	0.223 kg
44/3 RU-HW	HF cable clamp 44/3 RU-HW	176 mm	44 mm	39 mm	1 1/4 inch	3	0.314 kg



Artikel	Typ	H _{max}	B	D	D	cables	W
32/3 RU-HW	HF cable clamp 32/3 RU-HW	136 mm	32 mm	29 mm	7/8 inch	3	0.213 kg
56/2 RU-HW	HF cable clamp 56/2 RU-HW	164 mm	56 mm	51 mm	1 5/8 inch	2	0.283 kg
56 RU-HW	HF cable clamp 56 RU-HW	106 mm	56 mm	51 mm	1 5/8 inch	1	0.181 kg
44 RU-HW	HF cable clamp 44 RU-HW	83 mm	44 mm	39 mm	1 1/4 inch	1	0.141 kg

DETAIL- UND ANWENDUNGSBILDER

