


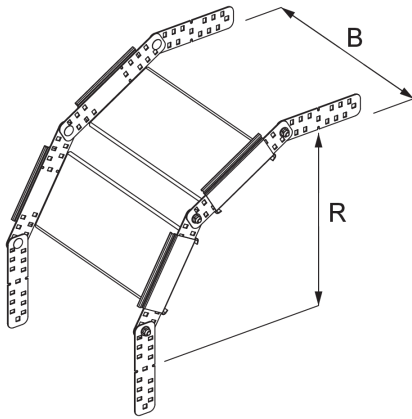

RVB 60

Cable tray vertical bend, height = 60 mm


The cable tray vertical bend RVB 60 allows the direction of cable routing to be changed flexibly and vertically. It is inserted into the cable tray along with a REB cable tray end plate and bolted to the bottom and sides. The vertical bend RVB 60 is suitable for cable trays with sides 60 mm high. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

Artikel	Typ	H	B	R	direction	W	W
RVB 60-10S	Cable tray vertical bend RVB 60-10S	60 mm	100 mm	300 mm	rising/falling	var.	2.076 kg
RVB 60-50S	Cable tray vertical bend RVB 60-50S	60 mm	500 mm	300 mm	rising/falling	var.	3.474 kg
RVB 60-60S	Cable tray vertical bend RVB 60-60S	60 mm	600 mm	300 mm	rising/falling	var.	3.822 kg
RVB 60-40S	Cable tray vertical bend RVB 60-40S	60 mm	400 mm	300 mm	rising/falling	var.	3.124 kg
RVB 60-30S	Cable tray vertical bend RVB 60-30S	60 mm	300 mm	300 mm	rising/falling	var.	2.776 kg
RVB 60-20S	Cable tray vertical bend RVB 60-20S	60 mm	200 mm	300 mm	rising/falling	var.	2.426 kg
RVB 60-05S	Cable tray vertical bend RVB 60-10S	60 mm	50 mm	300 mm	rising/falling	var.	1.902 kg

Artikel	Typ	H	B	R	direction	W	W
RVB 60-10F	Cable tray vertical bend RVB 60-10F	60 mm	100 mm	300 mm	rising/falling	var.	2.220 kg
RVB 60-60F	Cable tray vertical bend RVB 60-60F	60 mm	600 mm	300 mm	rising/falling	var.	4.088 kg
RVB 60-40F	Cable tray vertical bend RVB 60-40F	60 mm	400 mm	300 mm	rising/falling	var.	3.340 kg
RVB 60-30F	Cable tray vertical bend RVB 60-30F	60 mm	300 mm	300 mm	rising/falling	var.	2.966 kg
RVB 60-20F	Cable tray vertical bend RVB 60-20F	60 mm	200 mm	300 mm	rising/falling	var.	2.594 kg
RVB 60-50F	Cable tray vertical bend RVB 60-50F	60 mm	500 mm	300 mm	rising/falling	var.	3.714 kg



DETAIL- UND ANWENDUNGSBILDER

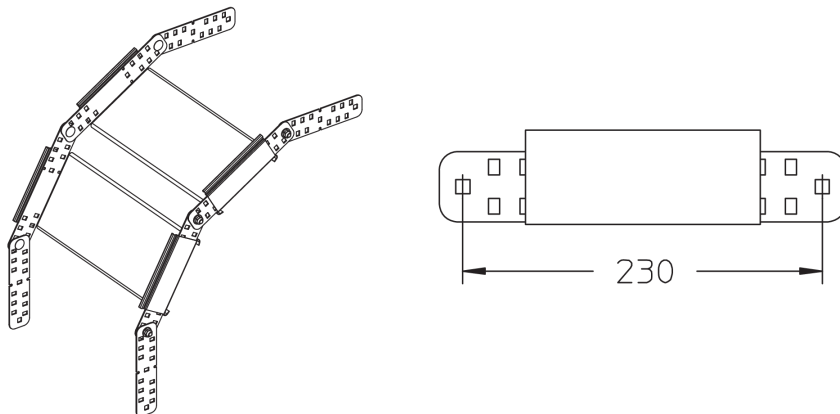

OPTIONALES ZUBEHÖR

REB

