


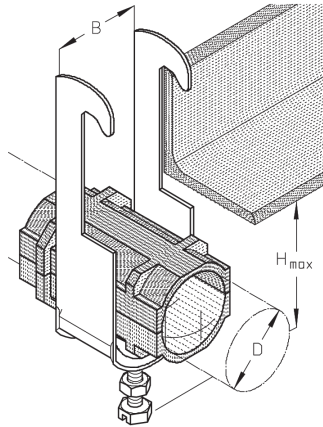

## S-HW

### Cable clamp for fastening to angle profiles

The HF cable clamp S-HW with full-surface pressure trough made of galvanised steel and plastic half troughs made of polystyrene can route fibre-optic/high-frequency cables with a maximum diameter of 1 5/8 inches. They are suitable for attachment to angle profiles with a leg length of max. 40 mm. We provide components in various materials and surface finishes to ensure that various requirements for different areas of application are met.

| Artikel     | Typ                         | H <sub>max</sub> | B     | D     | D          | cables | W        |
|-------------|-----------------------------|------------------|-------|-------|------------|--------|----------|
| 20 S-HW-E   | HF cable clamp 20 S-HW-VA   | 53 mm            | 20 mm | 17 mm | 1/2 inch   | 1      | 0.047 kg |
| 20/3 S-HW-E | HF cable clamp 20/3 S-HW-VA | 93 mm            | 20 mm | 17 mm | 1/2 inch   | 3      | 0.068 kg |
| 32/2 S-HW-E | HF cable clamp 32/2 S-HW-VA | 102 mm           | 32 mm | 29 mm | 7/8 inch   | 2      | 0.086 kg |
| 32 S-HW-E   | HF cable clamp 32 S-HW-VA   | 68 mm            | 32 mm | 29 mm | 7/8 inch   | 1      | 0.069 kg |
| 20/2 S-HW-E | HF cable clamp 20/2 S-HW-VA | 73 mm            | 20 mm | 17 mm | 1/2 inch   | 2      | 0.058 kg |
| 32/3 S-HW-E | HF cable clamp 32/3 S-HW-VA | 136 mm           | 32 mm | 29 mm | 7/8 inch   | 3      | 0.103 kg |
| 44 S-HW-E   | HF cable clamp 44 S-HW-VA   | 83 mm            | 44 mm | 39 mm | 1 1/4 inch | 1      | 0.131 kg |
| 44/2 S-HW-E | HF cable clamp 44/2 S-HW-VA | 129 mm           | 44 mm | 39 mm | 1 1/4 inch | 2      | 0.179 kg |
| 44/3 S-HW-E | HF cable clamp 44/3 S-HW-VA | 176 mm           | 44 mm | 39 mm | 1 1/4 inch | 3      | 0.269 kg |
| 56 S-HW-E   | HF cable clamp 56 S-HW-VA   | 106 mm           | 56 mm | 51 mm | 1 5/8 inch | 1      | 0.167 kg |
| 56/2 S-HW-E | HF cable clamp 56/2 S-HW-VA | 164 mm           | 56 mm | 51 mm | 1 5/8 inch | 2      | 0.255 kg |

| Artikel   | Typ                      | H <sub>max</sub> | B     | D     | D          | cables | W        |
|-----------|--------------------------|------------------|-------|-------|------------|--------|----------|
| 20 S-HW   | HF cable clamp 20 S-HW   | 53 mm            | 20 mm | 17 mm | 1/2 inch   | 1      | 0.049 kg |
| 20/3 S-HW | HF cable clamp 20/3 S-HW | 93 mm            | 20 mm | 17 mm | 1/2 inch   | 3      | 0.071 kg |
| 32/2 S-HW | HF cable clamp 32/2 S-HW | 102 mm           | 32 mm | 29 mm | 7/8 inch   | 2      | 0.091 kg |
| 32 S-HW   | HF cable clamp 32 S-HW   | 68 mm            | 32 mm | 29 mm | 7/8 inch   | 1      | 0.073 kg |
| 20/2 S-HW | HF cable clamp 20/2 S-HW | 73 mm            | 20 mm | 17 mm | 1/2 inch   | 2      | 0.060 kg |
| 44 S-HW   | HF cable clamp 44 S-HW   | 83 mm            | 44 mm | 39 mm | 1 1/4 inch | 1      | 0.145 kg |
| 56 S-HW   | HF cable clamp 56 S-HW   | 106 mm           | 56 mm | 51 mm | 1 5/8 inch | 1      | 0.182 kg |



## DETAIL- UND ANWENDUNGSBILDER

