


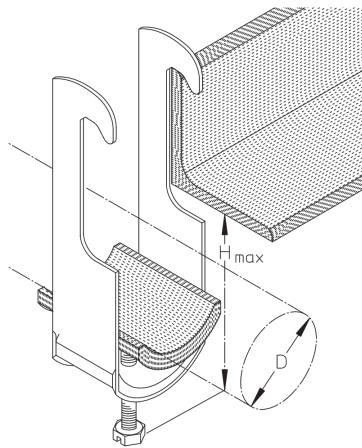

## S-IW

Cable clamp with additional insulating tray for fastening to angle profiles

The S-IW cable clamp with a full-surface pressure trough and an additional insulating trough made of polystyrene can route cables with a maximum diameter of 70 mm. It is suitable for attachment to angle profiles and U profiles with a leg length of 40 mm. On request, a GW counter trough can be fitted for improved cable support.


The article is also available with lock nuts. This prevents the clamp from unintentionally coming loose. Lock nuts must be specified separately when ordering.

The S-IW cable clamp is made of galvanised steel. Items with a diameter of 12 to 52 mm are also available in aluminium or stainless steel with material no. 1.4301 (V2A) and 1.4571/1.4404 (V4A).

| Artikel | Typ                 | H <sub>max</sub> | D          | M    | cables | W        |
|---------|---------------------|------------------|------------|------|--------|----------|
| 16 S-IW | Cable clamp 16 S-IW | 47.5 mm          | 12 - 16 mm | 2 Nm | 1      | 0.040 kg |
| 20 S-IW | Cable clamp 20 S-IW | 51.5 mm          | 16 - 20 mm | 2 Nm | 1      | 0.045 kg |
| 12 S-IW | Cable clamp 12 S-IW | 42.5 mm          | 8 - 12 mm  | 2 Nm | 1      | 0.037 kg |
| 28 S-IW | Cable clamp 28 S-IW | 59.7 mm          | 24 - 28 mm | 2 Nm | 1      | 0.054 kg |
| 32 S-IW | Cable clamp 32 S-IW | 65 mm            | 28 - 32 mm | 2 Nm | 1      | 0.064 kg |
| 24 S-IW | Cable clamp 24 S-IW | 55.7 mm          | 20 - 24 mm | 2 Nm | 1      | 0.049 kg |
| 40 S-IW | Cable clamp 40 S-IW | 73 mm            | 36 - 40 mm | 2 Nm | 1      | 0.074 kg |
| 44 S-IW | Cable clamp 44 S-IW | 83 mm            | 40 - 44 mm | 4 Nm | 1      | 0.110 kg |
| 36 S-IW | Cable clamp 36 S-IW | 69 mm            | 32 - 36 mm | 2 Nm | 1      | 0.069 kg |
| 48 S-IW | Cable clamp 48 S-IW | 87 mm            | 44 - 48 mm | 4 Nm | 1      | 0.112 kg |
| 56 S-IW | Cable clamp 56 S-IW | 96.5 mm          | 52 - 56 mm | 4 Nm | 1      | 0.134 kg |
| 52 S-IW | Cable clamp 52 S-IW | 92.5 mm          | 48 - 52 mm | 4 Nm | 1      | 0.123 kg |
| 60 S-IW | Cable clamp 60 S-IW | 100.5 mm         | 56 - 60 mm | 4 Nm | 1      | 0.163 kg |
| 70 S-IW | Cable clamp 70 S-IW | 111.5 mm         | 64 - 70 mm | 4 Nm | 1      | 0.192 kg |
| 64 S-IW | Cable clamp 64 S-IW | 104.5 mm         | 60 - 64 mm | 4 Nm | 1      | 0.184 kg |



## DETAIL- UND ANWENDUNGSBILDER

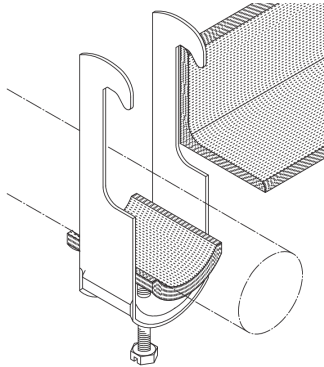

## OPTIONALES ZUBEHÖR

GW 12-70

