


SA

Anchor bolt

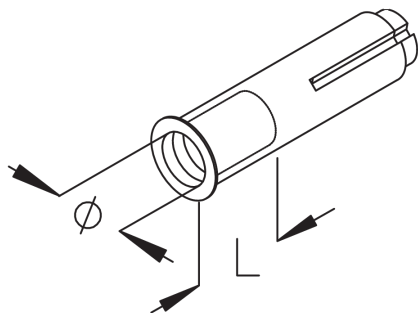

The approved anchor bolt SA is used to fasten supporting structures such as bracket holders or wall brackets to walls and/or ceilings. It is permitted to be used as a multiple fastener in non-cracked standard concrete with strength $\geq C20/25$. The manufacturer's specifications must be observed. The anchor bolt is available in diameters 8 to 15 mm. The permissible tensile force is up to 8.5 kN. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	D	Ø	L _{min}	P _{Zug}	W
SA 10	Anchor SA 10	12 mm	10 mm	44 mm	6.1 kN	0.022 kg
SA 12	Anchor SA 12	15 mm	12 mm	54 mm	8.5 kN	0.041 kg
SA 6	Anchor SA 6	8 mm	6 mm	27 mm	3.95 kN	0.008 kg
SA 8	Anchor SA 8	10 mm	8 mm	33 mm	3.95 kN	0.011 kg

Artikel	Typ	D	Ø	L _{min}	P _{Zug}	W
SA 10E4	Anchor SA 10E4	12 mm	10 mm	44 mm	6.1 kN	0.024 kg
SA 12E4	Anchor SA 12E4	15 mm	12 mm	54 mm	8.5 kN	0.015 kg
SA 6E4	Anchor SA 6E4	8 mm	6 mm	27 mm	3.95 kN	0.006 kg
SA 8E4	Anchor SA 8E4	10 mm	8 mm	33 mm	3.95 kN	0.012 kg

DETAIL- UND ANWENDUNGSBILDER



