


SAZ
Female anchor

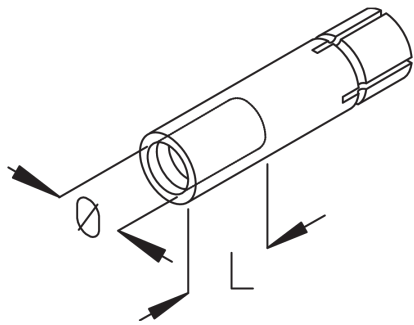




The approved female anchor SAZ is used to fasten supporting structures such as bracket holders or wall brackets to walls and/or ceilings. It is permitted to be used as a single attachment in cracked and non-cracked standard concrete with strength $\geq C20/25$. The manufacturer's specifications must be observed. The anchor bolt is available in diameters 6 to 12 mm. The permissible tensile force is up to 3.6 kN. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	D	Ø	L _{min}	P _{Zug}	W
SAZ 10	Anchor SAZ 10	12 mm	10 mm	43 mm	3.0 kN	0.019 kg
SAZ 12	Anchor SAZ 12	14 mm	12 mm	43 mm	3.6 kN	0.026 kg
SAZ 6	Anchor SAZ 6	8 mm	6 mm	43 mm	2.4 kN	0.032 kg
SAZ 8	Anchor SAZ 8	10 mm	8 mm	43 mm	1.6 kN	0.014 kg

Artikel	Typ	D	Ø	L _{min}	P _{Zug}	W
SAZ 10E4	Anchor SAZ 10E4	12 mm	10 mm	43 mm	3.0 kN	0.022 kg
SAZ 12E4	Anchor SAZ 12E4	14 mm	12 mm	43 mm	3.6 kN	0.044 kg
SAZ 8E4	Anchor SAZ 8E4	10 mm	8 mm	43 mm	1.6 kN	0.015 kg

DETAIL- UND ANWENDUNGSBILDER



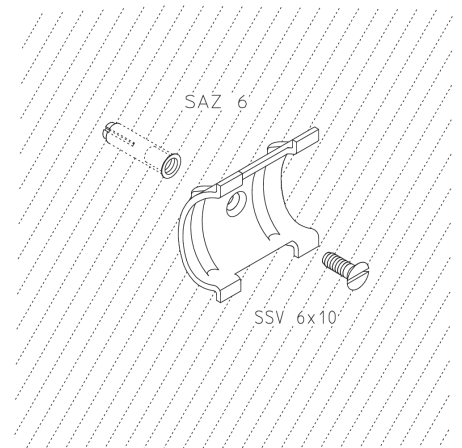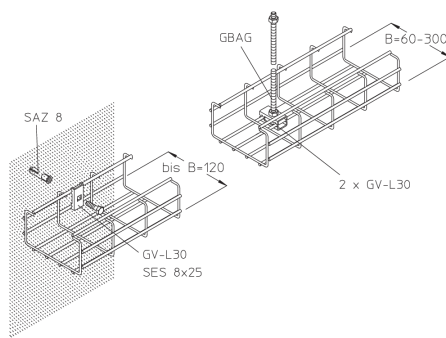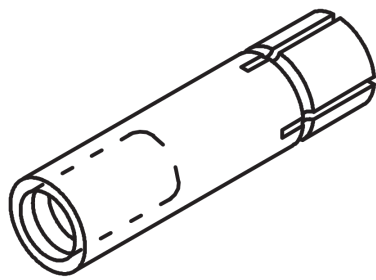

OPTIONALES ZUBEHÖR

SAZ-B, SAZ-D

