


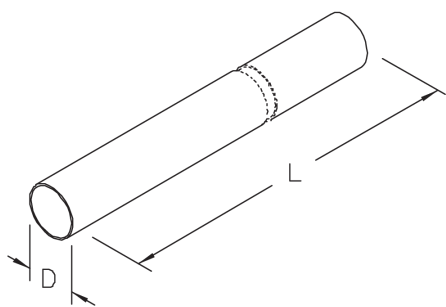

SR


Protective tube, length = 6000 mm

The protective tube SR is used to route cables in and out through cable trays and ladders safely and gently. It is 6000 mm long and either 30 or 60 mm in diameter. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	L	t	D	W
SR 30F	Protection tube SR 30F	6000 mm	1.50 mm	30 mm	6.650 kg
SR 60F	Protection tube SR 60F	6000 mm	2.00 mm	60 mm	17.400 kg

Artikel	Typ	L	t	D	W
SR 30E	Protection tube SR 30E	6000 mm	1.50 mm	30 mm	6.650 kg
SR 60E	Protection tube SR 60E	6000 mm	2.00 mm	60 mm	17.400 kg

DETAIL- UND ANWENDUNGSBILDER

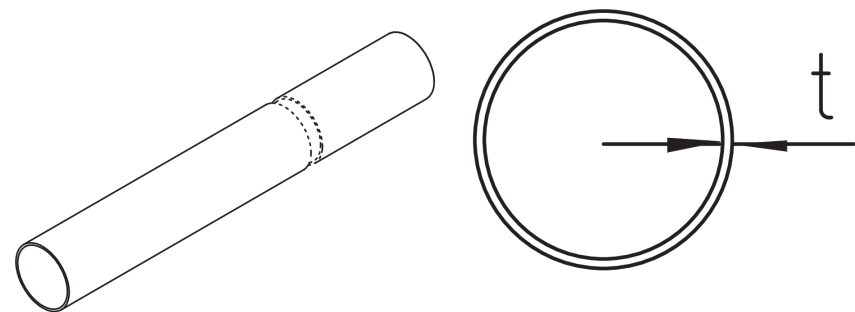

OPTIONALES ZUBEHÖR

SRM, SRML, SRF, SRFW, SRMP-C, SRMP-B, SRMP-A, SRS-W, SRS-B, SRS-A, SRS-R, SRB 45, SRB 90, SRHB, SRHD, SRK-O, SRK-G

