


SSV

Countersunk screw, DIN 963

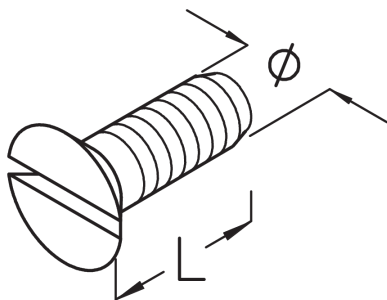

The countersunk screw SSV (in line with DIN 963) is available in lengths from 10 to 40 mm and with threads M6 and M8. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	L	Ø	W
SSV 6X10	Countersunk head screw SSV 6X10	10 mm	6 mm	0.002 kg
SSV 6X25	Countersunk head screw SSV 6X25	25 mm	6 mm	0.005 kg
SSV 6X40	Countersunk head screw SSV 6X40	40 mm	6 mm	0.007 kg

Artikel	Typ	L	Ø	W
SSV 6X10E	Countersunk head screw SSV 6X10E	10 mm	6 mm	0.002 kg
SSV 8X10E	Countersunk head screw SSV 8X10E	10 mm	8 mm	0.005 kg

DETAIL- UND ANWENDUNGSBILDER



