

STU 62

Vertical ladder, isosceles U profile

STU 62 vertical ladders consist of perforated side rails with U profiles and rungs made of 40x22 mm profile rails. They are designed for a maximum load of up to 4.00 kN, are 200 to 1200 mm wide and are available in standard lengths of 3000 and 6000 mm. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

The appropriate cable clamp is the AC clamp.

Steel, hot-dip galvanised

Article	H	B1	B2	L	t	P_{max}	G
STU 62-02-3F Vertical Ladder STU 62-02-3F	60 mm	200 mm	200 mm	3000 mm	4.00 mm	4.00 kN	24.900 kg
STU 62-03-3F Vertical Ladder STU 62-03-3F	60 mm	300 mm	300 mm	3000 mm	4.00 mm	4.00 kN	26.400 kg
STU 62-04-3F Vertical Ladder STU 62-04-3F	60 mm	400 mm	400 mm	3000 mm	4.00 mm	4.00 kN	28.000 kg
STU 62-05-3F Vertical Ladder STU 62-05-3F	60 mm	500 mm	500 mm	3000 mm	4.00 mm	4.00 kN	29.500 kg
STU 62-06-3F Vertical ladder STU 62-06-3F	60 mm	600 mm	600 mm	3000 mm	4.00 mm	4.00 kN	31.100 kg
STU 62-07-3F Vertical Ladder STU 62-07-3F	60 mm	700 mm	700 mm	3000 mm	4.00 mm	4.00 kN	32.600 kg
STU 62-08-3F Vertical Ladder STU 62-08-3F	60 mm	800 mm	800 mm	3000 mm	4.00 mm	4.00 kN	34.200 kg
STU 62-09-3F Vertical Ladder STU 62-09-3F	60 mm	900 mm	900 mm	3000 mm	4.00 mm	4.00 kN	35.700 kg
STU 62-10-3F Vertical Ladder STU 62-10-3F	60 mm	1000 mm	1000 mm	3000 mm	4.00 mm	4.00 kN	37.200 kg
STU 62-11-3F Vertical Ladder STU 62-11-3F	60 mm	1100 mm	1100 mm	3000 mm	4.00 mm	4.00 kN	38.800 kg
STU 62-12-3F Vertical Ladder STU 62-12-3F	60 mm	1200 mm	1200 mm	3000 mm	4.00 mm	4.00 kN	40.300 kg
STU 62-02F Vertical ladder STU 62-02F	60 mm	200 mm	200 mm	6000 mm	4.00 mm	4.00 kN	49.880 kg
STU 62-03F Vertical ladder STU 62-03F	60 mm	300 mm	300 mm	6000 mm	4.00 mm	4.00 kN	52.880 kg
STU 62-04F Vertical ladder STU 62-04F	60 mm	400 mm	400 mm	6000 mm	4.00 mm	4.00 kN	56.080 kg

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

Article	H	B1	B2	L	t	P_{max}	G
STU 62-05F Vertical ladder STU 62-05F	60 mm	500 mm	500 mm	6000 mm	4.00 mm	4.00 kN	59.080 kg
STU 62-06F Vertical ladder STU 62-06F	60 mm	600 mm	600 mm	6000 mm	4.00 mm	4.00 kN	62.280 kg
STU 62-07F Vertical ladder STU 62-07F	60 mm	700 mm	700 mm	6000 mm	4.00 mm	4.00 kN	65.280 kg
STU 62-08F Vertical ladder STU 62-08F	60 mm	800 mm	800 mm	6000 mm	4.00 mm	4.00 kN	68.480 kg
STU 62-09F Vertical ladder STU 62-09F	60 mm	900 mm	900 mm	6000 mm	4.00 mm	4.00 kN	71.480 kg
STU 62-10F Vertical ladder STU 62-10F	60 mm	1000 mm	1000 mm	6000 mm	4.00 mm	4.00 kN	74.480 kg
STU 62-11F Vertical ladder STU 62-11F	60 mm	1100 mm	1100 mm	6000 mm	4.00 mm	4.00 kN	77.680 kg
STU 62-12F Vertical ladder STU 62-12F	60 mm	1200 mm	1200 mm	6000 mm	4.00 mm	4.00 kN	80.680 kg

H: height
B1: width 1
B2: width 2
L: length
t: material thickness
P_{max}: maximum load
G: Weight per storage unit

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES

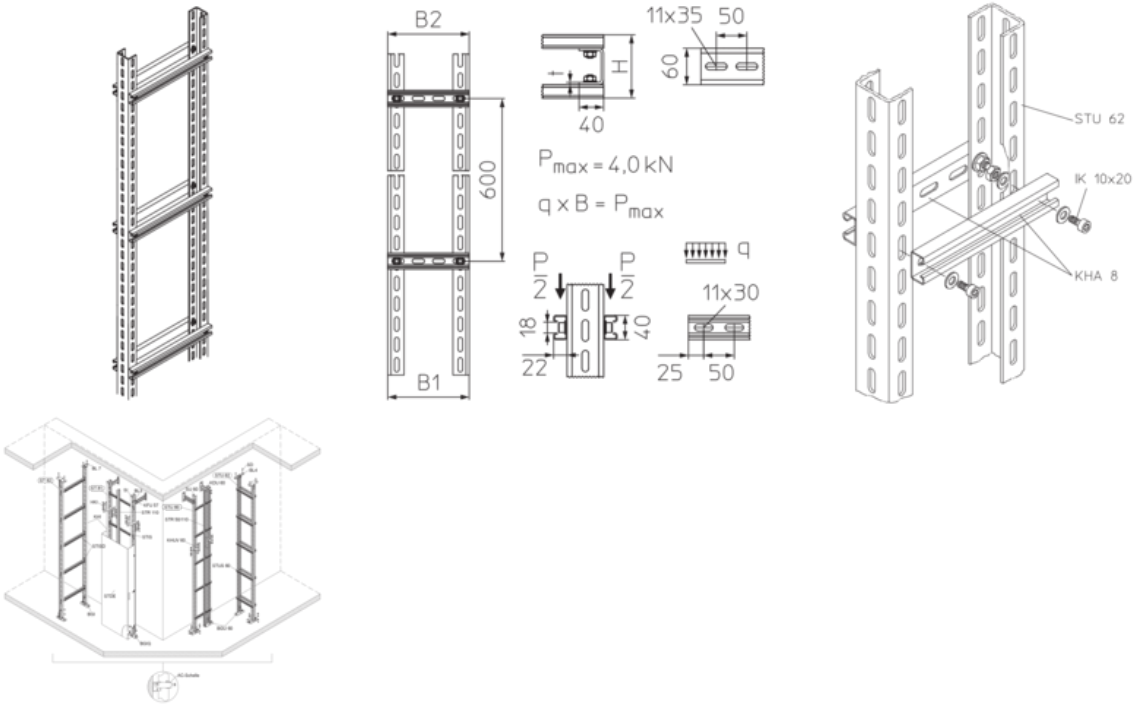

OPTIONAL ACCESSORIES

STUS 60, AC, KHUV 60, STR 50, STR 110, STD-A, RD, BGU 60, BL 4, SU 60, KZF, KZS

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved