


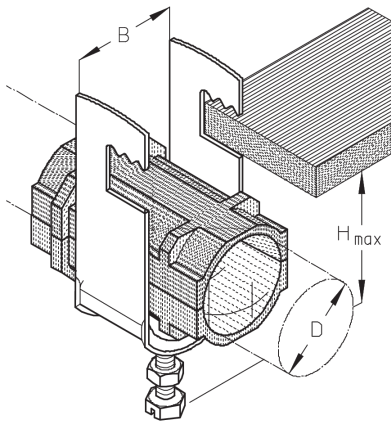

U-HW

Cable clamp for fastening to flat profiles

The HF cable clamp U-HW with full-surface pressure trough made of galvanised steel and plastic half troughs made of polystyrene can route fibre-optic/high-frequency cables with a maximum diameter of 1 5/8 inches. It is suitable for fastening to flat profiles made from material max. 12 mm thick. We provide components in various materials and surface finishes to ensure that various requirements for different areas of application are met.

Artikel	Typ	H _{max}	B	D	D	cables	W
20 U-HW-E	HF cable clamp 20 U-HW-VA	53 mm	20 mm	17 mm	1/2 inch	1	0.041 kg
32 U-HW-E	HF cable clamp 32 U-HW-VA	68 mm	32 mm	29 mm	7/8 inch	1	0.063 kg
20/3 U-HW-E	HF cable clamp 20/3 U-HW-VA	93 mm	20 mm	17 mm	1/2 inch	3	0.062 kg
20/2 U-HW-E	HF cable clamp 20/2 U-HW-VA	73 mm	20 mm	17 mm	1/2 inch	2	0.052 kg
32/3 U-HW-E	HF cable clamp 32/3 U-HW-VA	136 mm	32 mm	29 mm	7/8 inch	3	0.138 kg
44 U-HW-E	HF cable clamp 44 U-HW-VA	83 mm	44 mm	39 mm	1 1/4 inch	1	0.125 kg
44/2 U-HW-E	HF cable clamp 44/2 U-HW-VA	129 mm	44 mm	39 mm	1 1/4 inch	2	0.192 kg
44/3 U-HW-E	HF cable clamp 44/3 U-HW-VA	176 mm	44 mm	39 mm	1 1/4 inch	3	0.268 kg
32/2 U-HW-E	HF cable clamp 32/2 U-HW-VA	102 mm	32 mm	29 mm	7/8 inch	2	0.079 kg
56 U-HW-E	HF cable clamp 56 U-HW-VA	106 mm	56 mm	51 mm	1 5/8 inch	1	0.155 kg
56/2 U-HW-E	HF cable clamp 56/2 U-HW-VA	164 mm	56 mm	51 mm	1 5/8 inch	2	0.251 kg

Artikel	Typ	H _{max}	B	D	D	cables	W
20 U-HW	HF cable clamp 20 U-HW	53 mm	20 mm	17 mm	1/2 inch	1	0.043 kg
32 U-HW	HF cable clamp 32 U-HW	68 mm	32 mm	29 mm	7/8 inch	1	0.066 kg
20/3 U-HW	HF cable clamp 20/3 U-HW	93 mm	20 mm	17 mm	1/2 inch	3	0.065 kg
20/2 U-HW	HF cable clamp 20/2 U-HW	73 mm	20 mm	17 mm	1/2 inch	2	0.054 kg
32/3 U-HW	HF cable clamp 32/3 U-HW	136 mm	32 mm	29 mm	7/8 inch	3	0.100 kg
44 U-HW	HF cable clamp 44 U-HW	83 mm	44 mm	39 mm	1 1/4 inch	1	0.130 kg
44/2 U-HW	HF cable clamp 44/2 U-HW	129 mm	44 mm	39 mm	1 1/4 inch	2	0.207 kg



Artikel	Typ	H _{max}	B	D	D	cables	W
32/2 U-HW	HF cable clamp 32/2 U-HW	102 mm	32 mm	29 mm	7/8 inch	2	0.083 kg
56 U-HW	HF cable clamp 56 U-HW	106 mm	56 mm	51 mm	1 5/8 inch	1	0.161 kg
56/2 U-HW	HF cable clamp 56/2 U-HW	164 mm	56 mm	51 mm	1 5/8 inch	2	0.221 kg

DETAIL- UND ANWENDUNGSBILDER

