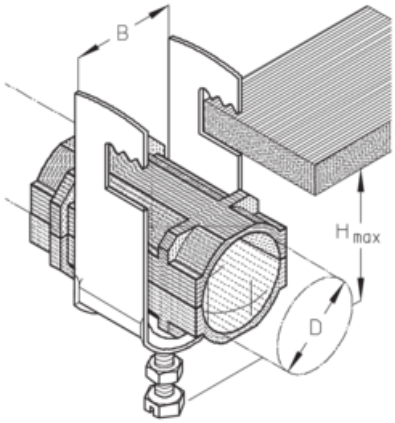

U-HW

Cable clamp for fastening to flat profiles

The HF cable clamp U-HW with full-surface pressure trough made of galvanised steel and plastic half troughs made of polystyrene can route fibre-optic/high-frequency cables with a maximum diameter of 1 5/8 inches. It is suitable for fastening to flat profiles made from material max. 12 mm thick. We provide components in various materials and surface finishes to ensure that various requirements for different areas of application are met.

steel, zinc plated

Article	H_{max}	B	D	D	cables	G
20 U-HW HF cable clamp 20 U-HW	53 mm	20 mm	17 mm	1/2 inch	1	0.043 kg
32 U-HW HF cable clamp 32 U-HW	68 mm	32 mm	29 mm	7/8 inch	1	0.076 kg
44 U-HW HF cable clamp 44 U-HW	83 mm	44 mm	39 mm	1 1/4 inch	1	0.102 kg
56 U-HW HF cable clamp 56 U-HW	106 mm	56 mm	51 mm	1 5/8 inch	1	0.161 kg
20/2 U-HW HF cable clamp 20/2 U-HW	73 mm	20 mm	17 mm	1/2 inch	2	0.054 kg
32/2 U-HW HF cable clamp 32/2 U-HW	102 mm	32 mm	29 mm	7/8 inch	2	0.113 kg
44/2 U-HW HF cable clamp 44/2 U-HW	129 mm	44 mm	39 mm	1 1/4 inch	2	0.138 kg
56/2 U-HW HF cable clamp 56/2 U-HW	164 mm	56 mm	51 mm	1 5/8 inch	2	0.221 kg
20/3 U-HW HF cable clamp 20/3 U-HW	93 mm	20 mm	17 mm	1/2 inch	3	0.065 kg
32/3 U-HW HF cable clamp 32/3 U-HW	136 mm	32 mm	29 mm	7/8 inch	3	0.150 kg

Stainless steel, acc. to AISI 304 (BS 304S31)

Article	H_{max}	B	D	D	cables	G
20 U-HW-E HF cable clamp 20 U-HW-VA	53 mm	20 mm	17 mm	1/2 inch	1	0.041 kg

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

Article	H_{max}	B	D	D	cables	G
32 U-HW-E HF cable clamp 32 U-HW-VA	68 mm	32 mm	29 mm	7/8 inch	1	0.073 kg
44 U-HW-E HF cable clamp 44 U-HW-VA	83 mm	44 mm	39 mm	11/4 inch	1	0.099 kg
56 U-HW-E HF cable clamp 56 U-HW-VA	106 mm	56 mm	51 mm	15/8 inch	1	0.155 kg
20/2 U-HW-E HF cable clamp 20/2 U-HW-VA	73 mm	20 mm	17 mm	1/2 inch	2	0.052 kg
32/2 U-HW-E HF cable clamp 32/2 U-HW-VA	102 mm	32 mm	29 mm	7/8 inch	2	0.109 kg
44/2 U-HW-E HF cable clamp 44/2 U-HW-VA	129 mm	44 mm	39 mm	11/4 inch	2	0.132 kg
56/2 U-HW-E HF cable clamp 56/2 U-HW-VA	164 mm	56 mm	51 mm	15/8 inch	2	0.251 kg
20/3 U-HW-E HF cable clamp 20/3 U-HW-VA	93 mm	20 mm	17 mm	1/2 inch	3	0.062 kg
32/3 U-HW-E HF cable clamp 32/3 U-HW-VA	136 mm	32 mm	29 mm	7/8 inch	3	0.138 kg
44/3 U-HW-E HF cable clamp 44/3 U-HW-VA	176 mm	44 mm	39 mm	11/4 inch	3	0.166 kg

H_{max}: maximum height
B: width
D: clamping range
D: Diameter (inch)
cables: max. number of cables
G: Weight per storage unit

PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES



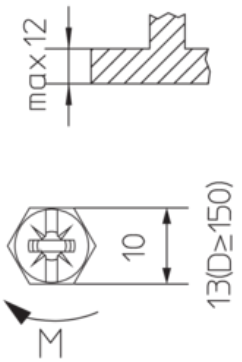

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved