


UBDHB250 2R

False floor socket, 2x, round






The UBDHB250 2R components are false floor sockets that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a formwork pipe, which is replaced by a round plastic installation unit during final assembly. The supplied earthing clamps are used for equipotential bonding. The floor sockets with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE/TÜV approval in accordance with DIN EN 50085.

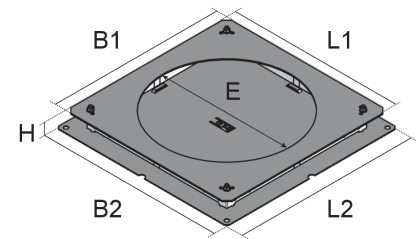

Artikel	Typ	H	H _{min}	B1	B2	L1	L2	mounting box	E	Geeignet für estrichbündigen geschlossenen Unterflurkanal	Geeignet für estrichüberdeckten Unterflurkanal	W
UBDHB250 28-259R	floor box- hollow space UBDHB250 28-259R,	31 mm	67 mm	385 mm	400 mm	385 mm	400 mm	2	260 mm	Nein (0)	Ja (1)	2.718 kg
UBDHB250 38-259R	floor box- hollow space UBDHB250 38-259R,	41 mm	77 mm	385 mm	400 mm	385 mm	400 mm	2	260 mm	Nein (0)	Ja (1)	2.802 kg
UBDHB250 48-259R	floor box- hollow space UBDHB250 48-259R,	51 mm	87 mm	385 mm	400 mm	385 mm	400 mm	2	260 mm	Nein (0)	Ja (1)	2.890 kg

DETAIL- UND ANWENDUNGSBILDER



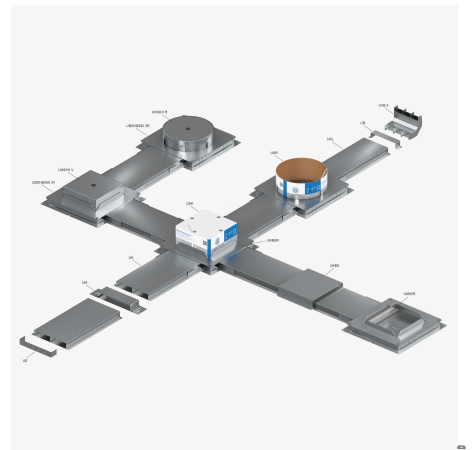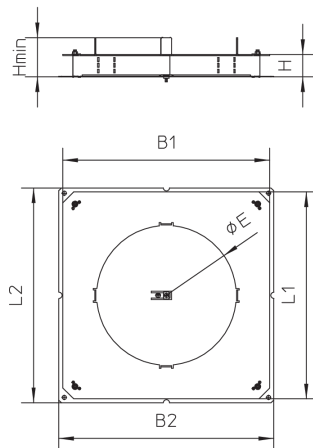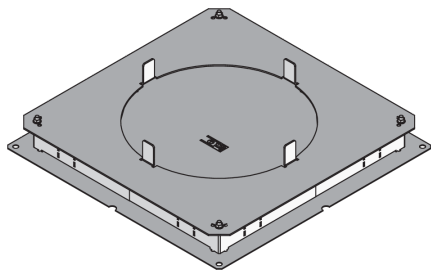

OPTIONALES ZUBEHÖR

USR, UN

DIN

Load requirements according to: DIN EN 50085

