


UBDHB250 3V

False floor socket, 3x, angular



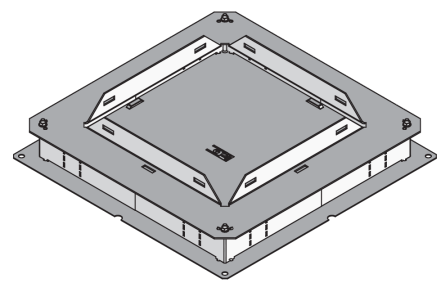


The UBDHB250 3V components are false floor sockets that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a formwork body, which is replaced by a square plastic or stainless steel installation unit during final assembly. The supplied earthing clamps are used for equipotential bonding. The floor sockets with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE/TÜV approval in accordance with DIN EN 50085.

Artikel	Typ	H	H _{min}	B1	B2	L1	L2	mounting box	E	Geeignet für estrichbündigen geschlossenen Unterflurkanal	Geeignet für estrichüberdeckten Unterflurkanal	W
UBDHB250 28-259V	floor box- hollow space UBDHB250 28-259V,	31 mm	67 mm	385 mm	400 mm	385 mm	400 mm	3	262 x 262 mm	Nein (0)	Ja (1)	2.832 kg
UBDHB250 38-259V	floor box- hollow space UBDHB250 38-259V,	41 mm	77 mm	385 mm	400 mm	385 mm	400 mm	3	262 x 262 mm	Nein (0)	Ja (1)	2.916 kg
UBDHB250 48-259V	floor box- hollow space UBDHB250 48-259V,	51 mm	87 mm	385 mm	400 mm	385 mm	400 mm	3	262 x 262 mm	Nein (0)	Ja (1)	3.004 kg

DETAIL- UND ANWENDUNGSBILDER



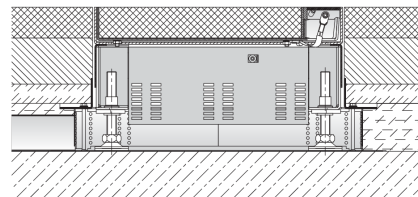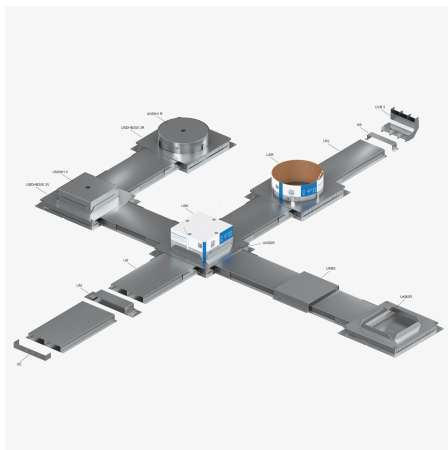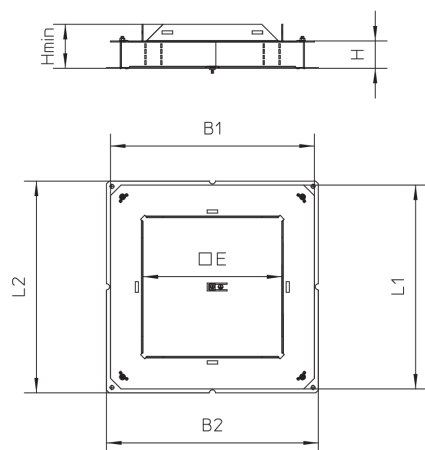

OPTIONALES ZUBEHÖR

USK, UN

DIN

Load requirements according to: DIN EN 50085

