


UBDHB350 3R

False floor socket, 3x, round





The UBDHB350 3R components are false floor sockets that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a formwork pipe, which is replaced by a round plastic or stainless steel installation unit during final assembly. The supplied earthing clamps are used for equipotential bonding. The floor sockets with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE/TÜV approval in accordance with DIN EN 50085.

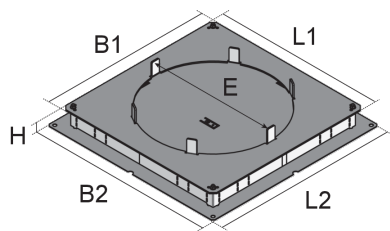

Artikel	Typ	H	H _{min}	B1	B2	L1	L2	mounting box	E	Geeignet für estrichbündigen geschlossenen Unterflurkanal	Geeignet für estrichüberdeckten Unterflurkanal	W
UBDHB350 28-308R	floor box-hollow space UBDHB350 28-308R,	31 mm	67 mm	410 mm	450 mm	410 mm	450 mm	3	310 mm	Nein (0)	Ja (1)	2.981 kg
UBDHB350 38-308R	floor box-hollow space UBDHB350 38-308R,	41 mm	77 mm	410 mm	450 mm	410 mm	450 mm	3	310 mm	Nein (0)	Ja (1)	3.073 kg
UBDHB350 48-308R	floor box-hollow space UBDHB350 48-308R,	51 mm	87 mm	410 mm	450 mm	410 mm	450 mm	3	310 mm	Nein (0)	Ja (1)	3.169 kg

DETAIL- UND ANWENDUNGSBILDER



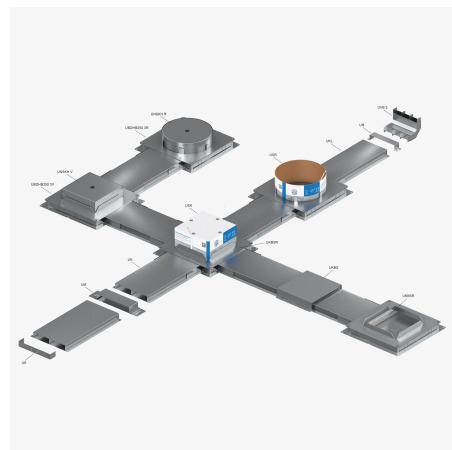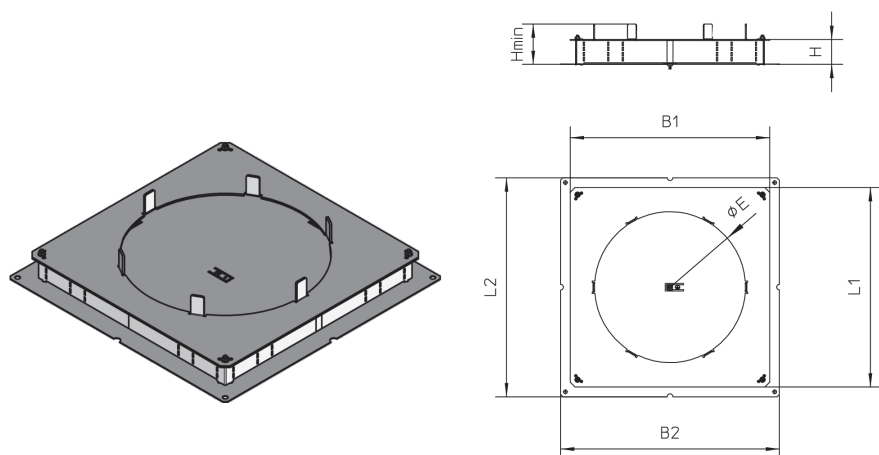

OPTIONALES ZUBEHÖR

USR, UN

DIN

Load requirements according to: DIN EN 50085

