


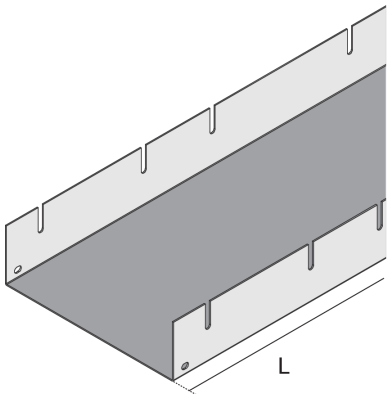

UBK
Lower part

UBK are bases for screed-flush heavy-duty floor ducts. The open duct bases are used for horizontal cable routing in demanding manufacturing areas such as the automotive industry. The components are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have slots to accommodate the side profiles. These bases are 3000 mm long and available in various heights and widths. Special designs are also available on request.

Artikel	Typ	H	B	L	E	W
UBK 100-20S	duct bottom piece UBK 100-20S, L=3000mm,	90 mm	194 mm	3000 mm	450 mm	17.220 kg
UBK 100-30S	duct bottom piece UBK 100-30S, L=3000mm,	90 mm	294 mm	3000 mm	550 mm	21.930 kg
UBK 100-40S	duct bottom piece UBK 100-40S, L=3000mm,	90 mm	394 mm	3000 mm	650 mm	26.640 kg
UBK 135-20S	duct bottom piece UBK 135-20S, L=3000mm,	125 mm	194 mm	3000 mm	450 mm	18.830 kg
UBK 135-30S	duct bottom piece UBK 135-30S, L=3000mm,	125 mm	294 mm	3000 mm	550 mm	25.240 kg
UBK 135-40S	duct bottom piece UBK 135-40S, L=3000mm,	125 mm	394 mm	3000 mm	650 mm	29.950 kg
UBK 170-20S	duct bottom piece UBK 170-20S, L=3000mm,	160 mm	194 mm	3000 mm	450 mm	23.810 kg
UBK 170-30S	duct bottom piece UBK 170-30S, L=3000mm,	160 mm	294 mm	3000 mm	550 mm	28.520 kg
UBK 170-40S	duct bottom piece UBK 170-40S, L=3000mm,	160 mm	394 mm	3000 mm	650 mm	33.230 kg

DETAIL- UND ANWENDUNGSBILDER



