


UBKAB

Profile outside bend

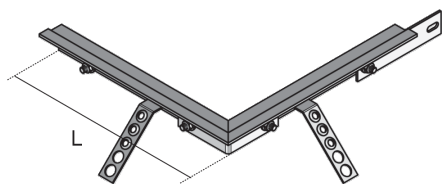

UBKAB articles are external bends for screed-flush heavy-duty ducts. These profile bends are used to create formed parts, e.g. 90° bends, by hooking them into the duct bases and side profiles. They can be mounted on site using the UBKV connectors. The bends are made of hot-dip galvanised steel in accordance with DIN EN ISO 1461 and are supplied with a UBKPRV connector, a UBKPRVE connector, four SEMS 8 nuts with flanges in accordance with DIN EN 1661 and four round-head bolts with square FRS 8X25 in accordance with DIN 603. The external bends are available in two lengths, 340 or 350 mm.

Artikel	Typ	L	t	W
UBKAB10F	outward profile bend D=10mm,	350 mm	10 mm	4.015 kg
UBKAB5F	outward profile bend D=5mm,	340 mm	5 mm	5.216 kg
UBKAB8F	outward profile bend D=7mm,	350 mm	7 mm	7.016 kg

DETAIL- UND ANWENDUNGSBILDER

