


UBKIB

Profile inside bend

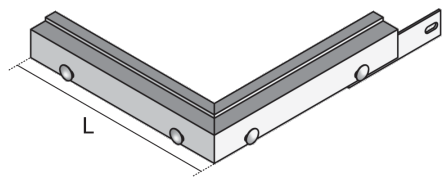

UBKIB components are profile internal bends for screed-flush heavy-duty ducts. These bends are used to create formed parts, e.g. branches, by hooking them into the duct bases and side profiles. They are made of hot-dip galvanised steel in accordance with DIN EN ISO 1461 and are supplied with the UBKPRV connector, four round-head bolts with square FRS 8X25 in accordance with DIN 603 and four nuts with flange SEMS 8 in accordance with DIN EN 1661. The profile bends are 300 mm long and come with UBKV connectors as suitable mounting parts.

Artikel	Typ	L	t	W
UBKIB10F	inward profile bend D=10mm,	300 mm	10 mm	3.620 kg
UBKIB5F	inward profile bend D=5mm,	300 mm	5 mm	2.460 kg
UBKIB8F	inward profile bend D=7mm,	300 mm	7 mm	3.000 kg

DETAIL- UND ANWENDUNGSBILDER

