


UBSFQT

Crossbeam




The UBSFQT component is a crossbeam for the screed-flush duct system UBSF and is used to fasten the cover and, at the same time, to support loads. It is also used to support cover joints. It is made of hot-dip galvanised sheet steel and is available in various widths. The component complies with DIN EN 50085 - the European standard for electrical installation duct systems, and is tested and certified by VDE.

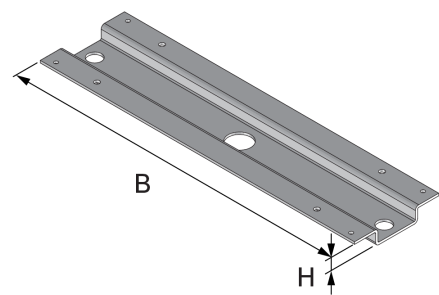

Artikel	Typ	H	B	W
UBSFQT 20S	duct bottom piece UBK 100-20S, L=3000mm,	13 mm	200 mm	0.254 kg
UBSFQT 30S	duct bottom piece UBK 100-20S, L=3000mm,	13 mm	300 mm	0.401 kg
UBSFQT 40S	duct bottom piece UBK 100-20S, L=3000mm,	13 mm	400 mm	0.541 kg
UBSFQT 50S	duct bottom piece UBK 100-20S, L=3000mm,	13 mm	500 mm	0.688 kg
UBSFQT 60S	duct bottom piece UBK 100-20S, L=3000mm,	13 mm	600 mm	0.835 kg

DETAIL- UND ANWENDUNGSBILDER

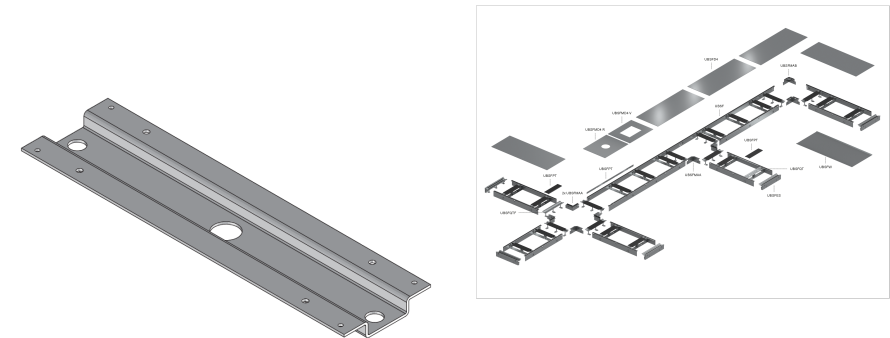

Load requirements according to: DIN EN 50085

