




UBSFW



Floor tray

The UBSFW component is a floor tray for the screed-flush duct system UBSF. If electromagnetic compatibility (EMC) is required, UBSFW can be used. It is made of hot-dip galvanised sheet steel and is available in various widths. The component complies with DIN EN 50085 - the European standard for electrical installation duct systems, and is tested and certified by VDE.

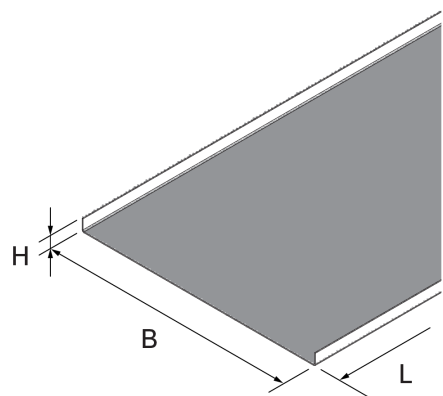

Artikel	Typ	H	B	L	t	W
UBSFW 20S	Floor pan	10 mm	200 mm	2000 mm	0.75 mm	2.565 kg
UBSFW 30S	Floor pan	10 mm	300 mm	2000 mm	0.75 mm	3.742 kg
UBSFW 40S	Floor pan	10 mm	400 mm	2000 mm	0.75 mm	4.920 kg
UBSFW 50S	Floor pan	10 mm	500 mm	2000 mm	0.75 mm	6.097 kg
UBSFW 60S	Floor pan	10 mm	600 mm	2000 mm	0.75 mm	7.275 kg

DETAIL- UND ANWENDUNGSBILDER

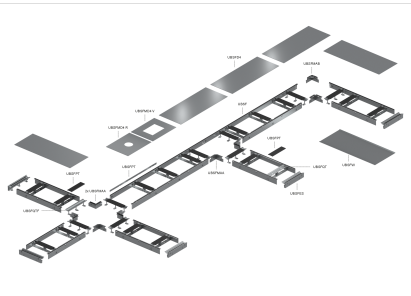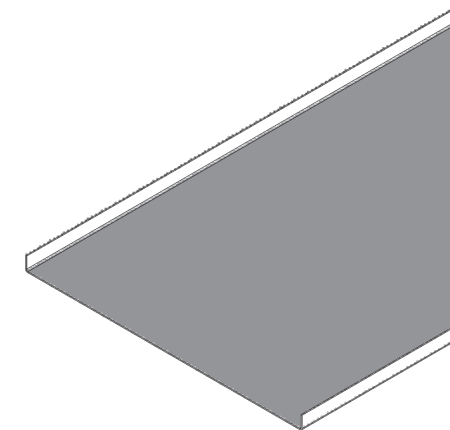

Load requirements according to: DIN EN 50085

