


UEBD R E

Stainless steel dummy cover unit, 3x, round





UEBD R E installation units are round dummy cover units with abutting edges. They can accommodate a maximum of three mounting boxes. They consist of height-adjustable mounting frames with a dummy insert cartridge, a rubber seal and the UGEAR-ELS earthing bracket. The components are suitable for use in wet-cleaned rooms with office traffic loads and are installed in assembly covers, UBDHB floor sockets and raised or false floor openings. The components are made of stainless steel V2A. They have an IP protection class of IP 54 in an unused condition, a max. load capacity of 2 kN, an adjustment range of 55 mm, an installation height of 100 or 117 mm and installation dimensions of 307 mm.

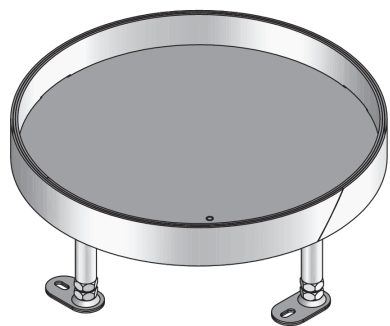

Artikel	Typ	H	H _{min}	N	P _{max}	ØB	ØE	IP _n	T	W
UEBD 15-R E	cartridge unit,	19 mm	100 mm	55 mm	2.00 kN	304 mm	307 mm	IP 54	12 mm	2.417 kg
UEBD 25-R E	Cassette unit	29 mm	110 mm	55 mm	2.00 kN	304 mm	307 mm	IP 54	12 mm	2.732 kg
UEBD 35-R E	cartridge unit,	38 mm	117 mm	55 mm	2.00 kN	305 mm	307 mm	IP 54	12 mm	4.031 kg

DETAIL- UND ANWENDUNGSBILDER

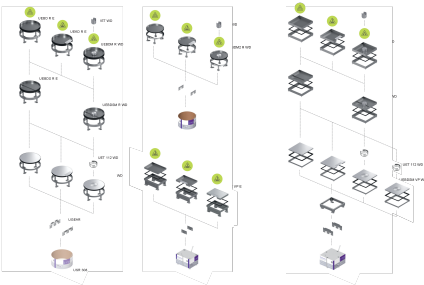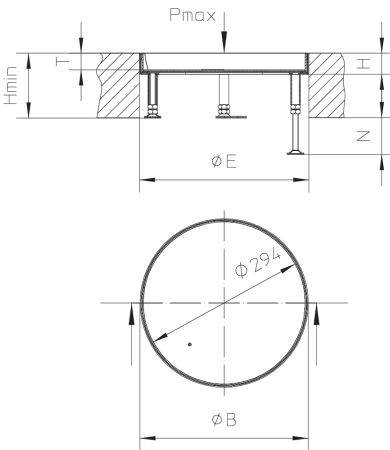

OPTIONALES ZUBEHÖR

UEBDE R, UBDSL F, UGM SL F

DIN

Load requirements according to: DIN EN 50085

