


UEBD2 R E

Stainless steel dummy cover unit, 2x, round





UEBD2 R E components are round dummy cover inserts. They consist of a cartridge mounting frame, a UGEAR-ELS earthing bracket, a rubber seal and a dummy insert cartridge for accommodating a maximum of two mounting boxes. The units are suitable for installation in UBDHB floor sockets, assembly covers and raised or false floor openings in wet-cleaned rooms with office traffic loads. Both the cartridges and the frames are made of stainless steel V2A. The cover units have an IP protection class of IP 54 in an unused condition, a maximum load capacity of 2 kN, an adjustment range of 55 mm, an installation dimension of 260 mm and a minimum installation height of 100 mm.



Artikel	Typ	H	H _{min}	N	P _{max}	ØB	ØE	IP _n	T	W
UEBD2 15-R E	cartridge unit,	18 mm	100 mm	55 mm	2.00 kN	258 mm	260 mm	IP 54	12 mm	2.032 kg
UEBD2 25-R E	cartridge unit,	28 mm	110 mm	55 mm	2.00 kN	258 mm	260 mm	IP 54	22 mm	2.256 kg

DETAIL- UND ANWENDUNGSBILDER

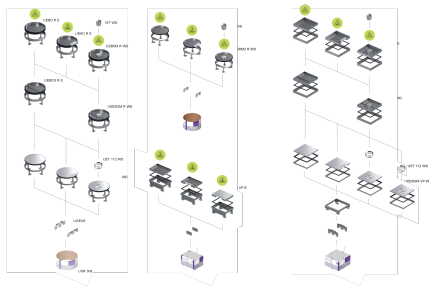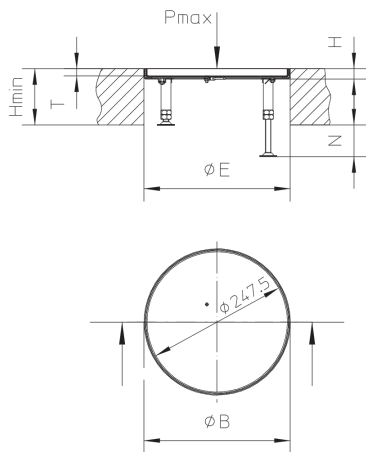

OPTIONALES ZUBEHÖR

UBDSL F, UGM SL F



DIN

Load requirements according to: DIN EN 50085

