


UEBDM2 R WD

Stainless steel tube cover unit, 2x, round





UEBDM2 R WD components are round tube cover units with abutting edges. They can accommodate a maximum of two mounting boxes. They consist of a height-adjustable cartridge mounting frame with a tube outlet cartridge, a bolted mounting kit and a rubber seal. The units are suitable for installation in UBDHB floor sockets, assembly covers and raised or false floor openings in wet-cleaned rooms with office traffic loads. Cassette and frame are made of stainless steel V2A and the mounting set is aluminium. They have an IP protection class of IP 54 in an unused condition, a maximum load capacity of 2 kN, an adjustment range of 55 mm, an installation dimension of 260 mm and a minimum installation height of 100 mm.



Artikel	Typ	H	H _{min}	N	P _{max}	ØB	mounting box	ØE	IP _g	IP _n	T	W
UEBDM2 15-R-WD	cartridge unit,	18 mm	100 mm	55 mm	2.00 kN	258 mm	2	260 mm	IP 22	IP 54	12 mm	2.136 kg
UEBDM2 25-R-WD	cartridge unit,	28 mm	110 mm	55 mm	2.00 kN	258 mm	2	260 mm	IP 22	IP 54	22 mm	2.574 kg

DETAIL- UND ANWENDUNGSBILDER

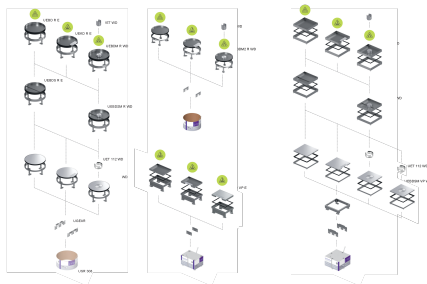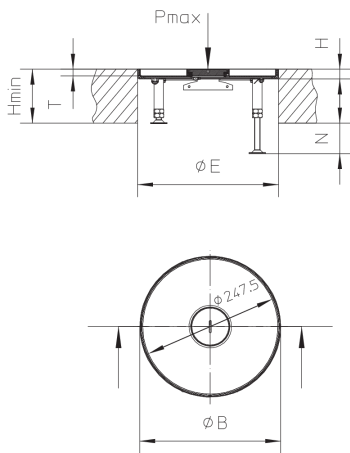

OPTIONALES ZUBEHÖR

UGEAR2, UET WD, UBDSLFL, UGM SLF

DIN

Load requirements according to: DIN EN 50085

