


UEBSESK

End piece, cartridge

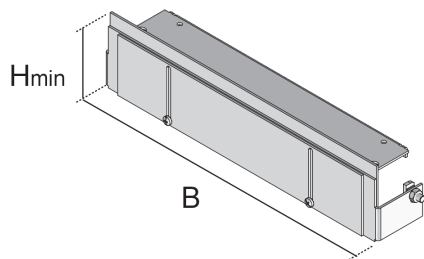



UEBSESK components are end piece cartridges that are used to close off screed-flush ducts. The products can be adapted to the necessary floor covering height. They are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346. They have a levelling range of 50 mm, various height and width dimensions and come with a cross-beam.

DIN

Artikel	Typ	H _{min}	N	W
UEBSESK15 100-20S	Final part catridge,	100 mm	50 mm	0.680 kg
UEBSESK15 100-30S	Final part catridge,	100 mm	50 mm	1.050 kg
UEBSESK15 100-40S	Final part catridge,	100 mm	50 mm	1.632 kg
UEBSESK15 100-50S	Final part catridge,	100 mm	50 mm	2.066 kg
UEBSESK15 60-20S	Final part catridge,	60 mm	50 mm	0.570 kg
UEBSESK15 60-30S	Final part catridge,	60 mm	50 mm	0.877 kg
UEBSESK15 60-40S	Final part catridge,	60 mm	50 mm	1.397 kg
UEBSESK15 60-50S	Final part catridge,	60 mm	50 mm	1.768 kg
UEBSESK25 100-20S	Final part catridge,	100 mm	50 mm	0.711 kg
UEBSESK25 100-30S	Final part catridge,	100 mm	50 mm	1.208 kg
UEBSESK25 100-40S	Final part catridge,	100 mm	50 mm	1.705 kg
UEBSESK25 100-50S	Final part catridge,	100 mm	50 mm	2.145 kg
UEBSESK25 60-20S	Final part catridge,	60 mm	50 mm	0.601 kg
UEBSESK25 60-30S	Final part catridge,	60 mm	50 mm	0.925 kg
UEBSESK25 60-40S	Final part catridge,	60 mm	50 mm	1.460 kg
UEBSESK25 60-50S	Final part catridge,	60 mm	50 mm	1.847 kg



DETAIL- UND ANWENDUNGSBILDER

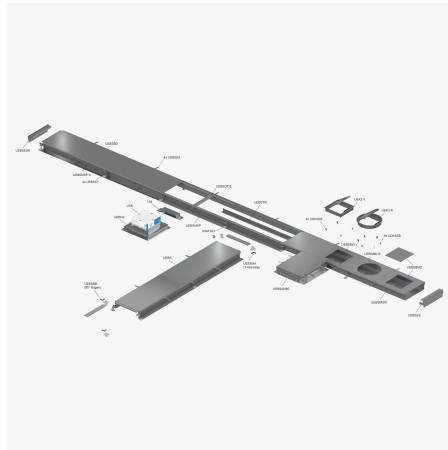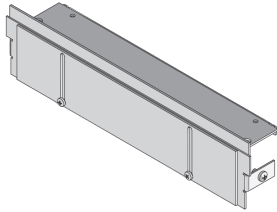

DIN

Load requirements according to: DIN EN 50085

