


UEBSV
Corner connector





DIN

UEBSV products are rotatable corner connectors for screed-flush ducts. The connectors are used in the assembly process to create a formed part. They can be used as internal or external corners depending on how they are positioned. The components are made of polyamide and are 50 or 57 mm high and 28 mm across.

Artikel	Typ	W
UEBSV	Corner connection,	0.026 kg
UEBSV-50	Corner connection,	0.021 kg

DETAIL- UND ANWENDUNGSBILDER

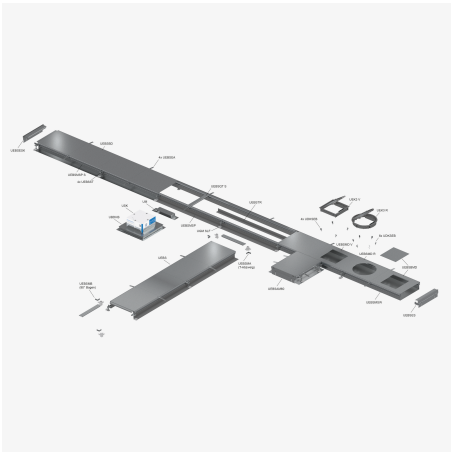

DIN

Load requirements according to: DIN EN 50085

