


UEKD R E

Stainless steel hinged cover unit, 3x, round





UEKD R E installation units are round hinged cover units with abutting edges. They can accommodate a maximum of three mounting boxes. They consist of height-adjustable cartridge mounting frames with a cable outlet cartridge, an opening lever and a rubber seal and are suitable for dry-cleaned and damp-cleaned rooms with office traffic loads. They are installed in UBDHB floor sockets, assembly covers and raised or false floor openings. The components are made of stainless steel V2A. They have an IP protection class of IP 30 in an unused condition, a max. load capacity of 2 kN, an adjustment range of 55 mm, a min. installation height of 100 mm and installation dimensions of 307 mm.

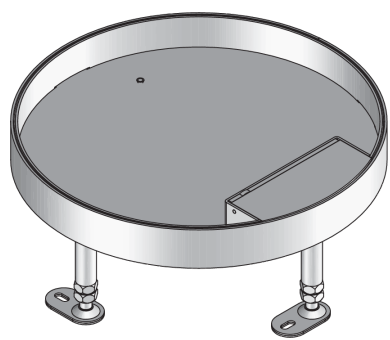

| Artikel     | Typ             | H     | H <sub>min</sub> | N     | P <sub>max</sub> | ØB     | mounting box | ØE     | IP <sub>g</sub> | IP <sub>n</sub> | T     | W        |
|-------------|-----------------|-------|------------------|-------|------------------|--------|--------------|--------|-----------------|-----------------|-------|----------|
| UEKD 15-R E | cartridge unit, | 19 mm | 100 mm           | 55 mm | 2.00 kN          | 304 mm | 3            | 307 mm | IP 20           | IP 30           | 12 mm | 2.367 kg |
| UEKD 25-R E | Cassette unit   | 29 mm | 110 mm           | 55 mm | 2.00 kN          | 304 mm | 3            | 307 mm | IP 20           | IP 30           | 22 mm | 2.872 kg |
| UEKD 35-R E | cartridge unit, | 38 mm | 117 mm           | 55 mm | 2.00 kN          | 305 mm | 3            | 307 mm | IP 20           | IP 30           | 30 mm | 4.146 kg |

DETAIL- UND ANWENDUNGSBILDER

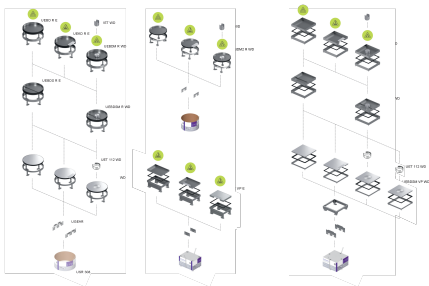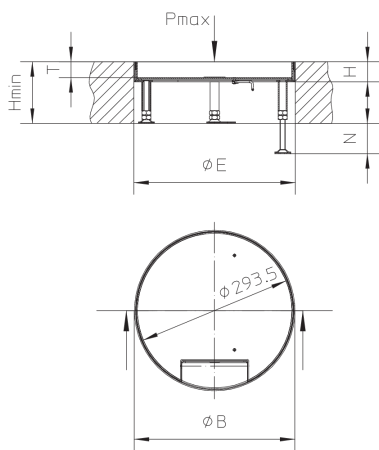

## OPTIONALES ZUBEHÖR

UEKDE R, UGEAR, UBDSLFL, UGM SLF

DIN

Load requirements according to: DIN EN 50085

