


UEKD RP E

Stainless steel hinged cover unit, 3x, round, flat





UEKD RP E installation units are round dummy cover units with abutting edges. They can accommodate a maximum of three mounting boxes. They consist of height-adjustable cartridge mounting frames with a dummy insert cartridge and a rubber seal and are suitable for dry-cleaned and wet-cleaned rooms with office traffic loads. They are installed in UBDHB floor sockets, assembly covers and raised or false floor openings. The components are made of stainless steel V2A and have a flat, blasted surface. They have an IP protection class of IP 30 in an unused condition, a max. load capacity of 4.00 kN, a levelling range of 55 mm and installation dimensions of 307 mm.

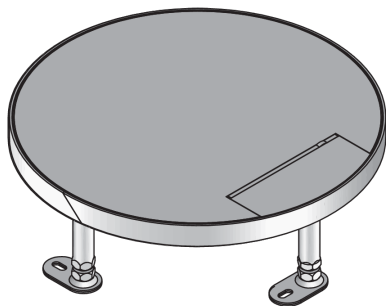

Artikel	Typ	H	H _{min}	N	P _{max}	ØB	ØE	IP _g	IP _n	W
UEKD 15-RP E	cartridge unit,	19 mm	100 mm	55 mm	4.00 kN	304 mm	307 mm	IP 20	IP 30	5.656 kg

DETAIL- UND ANWENDUNGSBILDER

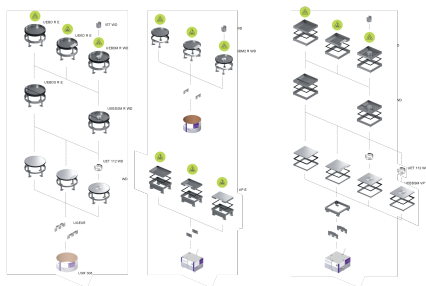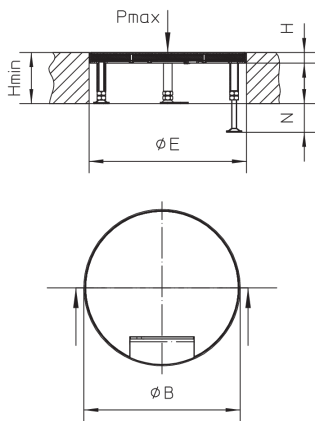

OPTIONALES ZUBEHÖR

UGEAR, UBDSLF, UGM SLF



Load requirements according to: DIN EN 50085

