


UEKD VP E



Stainless steel hinged cover unit, 3x, angular, flat

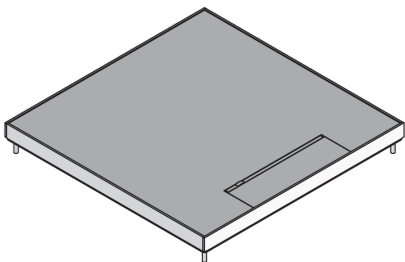

UEKD VP E components are square hinged cover units. They consist of a cartridge mounting frame with insert cartridge, cable outlet, floor-level cable outlet and rubber seal. Mounted on levelling units with Phillips screws, they accommodate max. 3 mounting boxes with installation devices and are used in floor sockets in dry-cleaned and damp-cleaned rooms with office traffic loads. The units are made of stainless steel with flat surfaces. They have an IP protection class of IP 30 in an unused condition, an IP protection class of IP 20 when used and a max. load capacity of 4.00 kN. They have installation dimensions of 261 x 261 mm and a minimum installation height of 85 mm.

Artikel	Typ	H	H _{min}	B	L	P _{max}	mounting box	E	IP _g	IP _n	T	W
UEKD 15-VP E	cartridge unit,	19 mm	85 mm	258 mm	258 mm	4.00 kN	3	261 x 261 mm	IP 20	IP 30	mm	4.634 kg

DETAIL- UND ANWENDUNGSBILDER

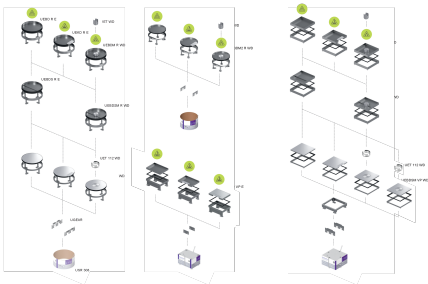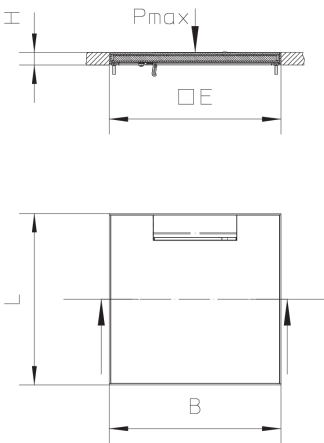

OPTIONALES ZUBEHÖR

UNE

DIN

Load requirements according to: DIN EN 50085

