


UEKD2 R E

Stainless steel hinged cover unit, 2x, round





UEKD2 R E components are round hinged cover units with abutting edges. They can accommodate a maximum of two mounting boxes. They consist of a height-adjustable cartridge mounting frame with a cable outlet cartridge, an opening lever and a rubber seal. The units are suitable for installation in UBDHB floor sockets, assembly covers and raised or false floor openings in wet-cleaned and damp-cleaned rooms with office traffic loads. Both the cartridge and frame are made of stainless steel V2A. They have an IP protection class of IP 30 in an unused condition, a maximum load capacity of 2 kN, an adjustment range of 55 mm, an installation dimension of 260 mm and a minimum installation height of 100 mm.



Artikel	Typ	H	H _{min}	N	P _{max}	ØB	mounting box	ØE	IP _g	IP _n	T	W
UEKD2 15- R E	cartridge unit,	18 mm	100 mm	55 mm	2.00 kN	258 mm	2	260 mm	IP 20	IP 30	12 mm	2.165 kg
UEKD2 25- R E	cartridge unit,	28 mm	110 mm	55 mm	2.00 kN	258 mm	2	260 mm	IP 20	IP 30	22 mm	2.425 kg

DETAIL- UND ANWENDUNGSBILDER

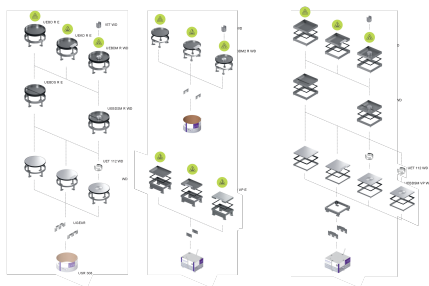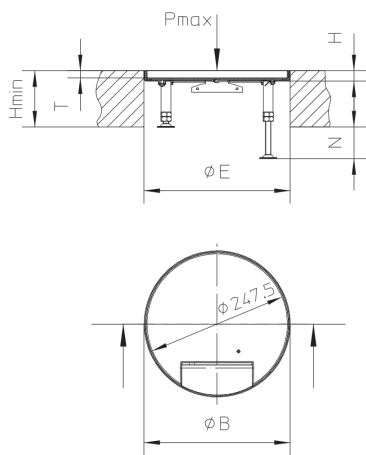

OPTIONALES ZUBEHÖR

UGEAR2, UBDSLIF, UGM SLF

DIN

Load requirements according to: DIN EN 50085

