


UEKD2 V E



Stainless steel hinged cover unit, 2x, angular

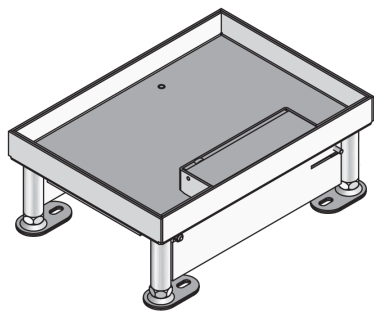

UEKD2 V E components are square hinged cover units with abutting edges. The levelling units consist of a cable outlet cartridge with an opening lever, floor-level cable outlet and a rubber seal. They are installed in floor sockets and raised or false floor openings and can be equipped with max. 2 mounting boxes. They are suitable for dry-cleaned and damp-cleaned rooms with office traffic loads. The cover with cable outlet and the frame are made of stainless steel V2A. The UEKD2 V E have an IP protection rating of IP 30 in an unused condition, a max. load capacity of 1.5 kN and have installation dimensions of 261 x 186 mm.

Artikel	Typ	H	H _{min}	B	L	N	P _{max}	mounting box	E	IP _g	IP _n	T	W
UEKD2 15-V E	cartridge unit,	19 mm	90 mm	185 mm	258 mm	45 mm	1.50 kN	2	261 x 186 mm	IP 20	IP 30	12.5 mm	2.330 kg
UEKD2 25-V E	cartridge unit,	29 mm	100 mm	185 mm	258 mm	45 mm	1.50 kN	2	261 x 186 mm	IP 20	IP 30	22.5 mm	2.637 kg

DETAIL- UND ANWENDUNGSBILDER

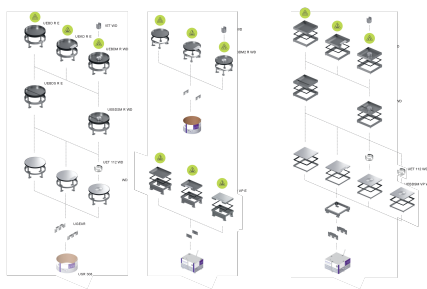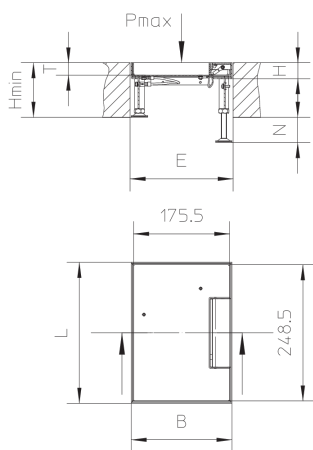

OPTIONALES ZUBEHÖR

UGEAV2, UBDSLFL, UGM SLF

DIN

Load requirements according to: DIN EN 50085

