


UG
Mounting box, angular


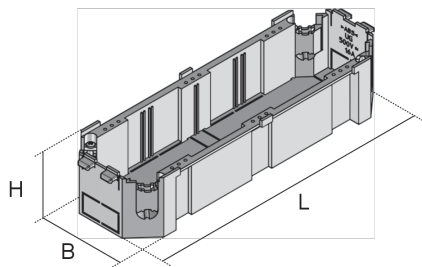


UG components are square mounting boxes consisting of a one-piece shell with a perforated base and a strain relief device for inserting the incoming cables. During assembly, the mounting boxes are snapped into installation units and can be equipped with three single or four snap-in modular installation units and two snap-in device connectors. The mounting boxes are made of acrylonitrile butadiene-styrene copolymer with a matt surface in graphite black (RAL 9011).

DIN

Artikel	Typ	H	B	L	colour	installation units/outlet socket	Zugentlastung	W
UG	device cup,	46 mm	74 mm	225 mm	RAL 9011 (graphite black)	3x Hngebgel oder 4x 45x45 mm	4x fr Kabel  6 bis 12 mm	0.114 kg

DETAIL- UND ANWENDUNGSBILDER

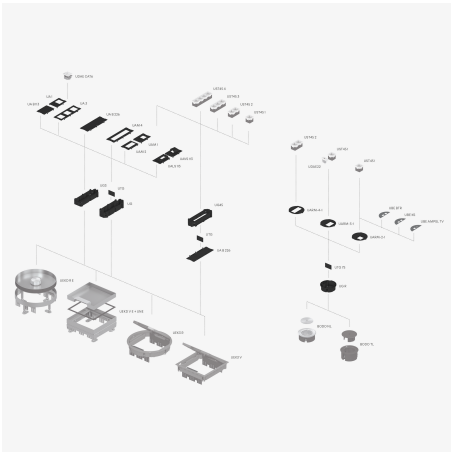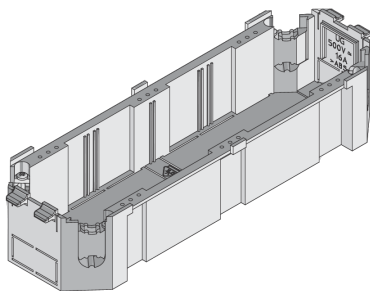

OPTIONALES ZUBEHR

UTG, UA B 226, UA B 113, UA 3, UA 1, UAM 4, UAM 2, UAM 1, UALS 113



DIN

Load requirements according to: DIN EN 50085

