

UKE160 V



Stainless steel hinged cover compact single outlet, 4-way, angular

UKE160 V are hinged cover compact single outlets consisting of a floor socket, a height-adjustable single outlet and a formwork body. The square components are inserted directly into the screed and are used to accommodate up to four installation devices. In addition, M25 pipes can be routed through the perforated side walls of the floor socket. The single outlets are made of stainless steel (V2A) or brass and are suitable for use in dry-cleaned and damp-cleaned rooms with office traffic loads. They are available with installation dimensions of 166 x 166 mm.



Artikel	Typ	H	H _{min}	B	L	N	P _{max}	E	IP _g	IP _n	W
UKE160 15-V E	Compact single outlet	19 mm	90 mm	160 mm	160 mm	35 mm	2.00 kN	166 x 166 mm	IP 20	IP 30	2.264 kg
UKE160 25-V E	Compact single outlet	29 mm	100 mm	160 mm	160 mm	35 mm	2.00 kN	166 x 166 mm	IP 20	IP 30	2.481 kg
UKE160 25-V MS	Compact single outlet	29 mm	100 mm	160 mm	160 mm	35 mm	2.00 kN	166 x 166 mm	IP 20	IP 30	3.005 kg

DETAIL- UND ANWENDUNGSBILDER

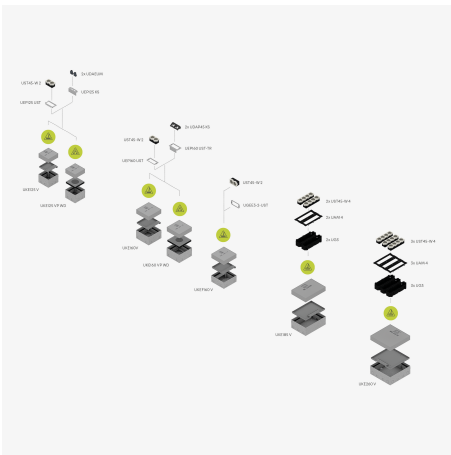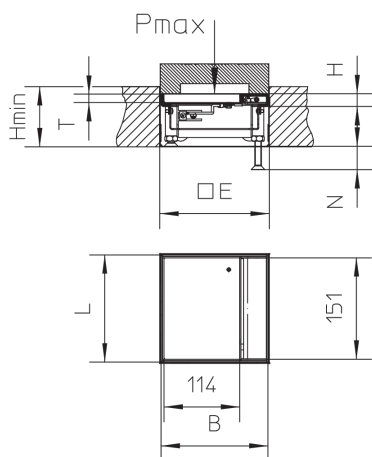

OPTIONALES ZUBEHÖR

UEP160 UST, UEP160 UST-TR, UET WD, UKENP 160, UEB 5

DIN

Load requirements according to: DIN EN 50085

