

UKE185 V



Stainless steel hinged cover compact single outlet, 8-way, angular

UKE185 V are hinged cover compact single outlets consisting of a floor socket, a height-adjustable single outlet and a formwork body. The square components are inserted directly into the screed and are used to accommodate up to eight installation devices. In addition, M25 pipes can be routed through the perforated side walls of the floor socket. The outlets are made of stainless steel (V2A) and are suitable for use in dry-cleaned and damp-cleaned rooms with office traffic loads. They are available with installation dimensions of 190 x 264 mm.



Artikel	Typ	H	H _{min}	B	L	N	P _{max}	E	IP _g	IP _n	W
UKE185 15-V E	Compact single outlet	19 mm	90 mm	185 mm	258 mm	35 mm	2.00 kN	190 x 264 mm	IP 20	IP 30	3.273 kg
UKE185 25-V E	Compact single outlet	29 mm	100 mm	185 mm	258 mm	35 mm	2.00 kN	190 x 264 mm	IP 20	IP 30	3.646 kg

DETAIL- UND ANWENDUNGSBILDER

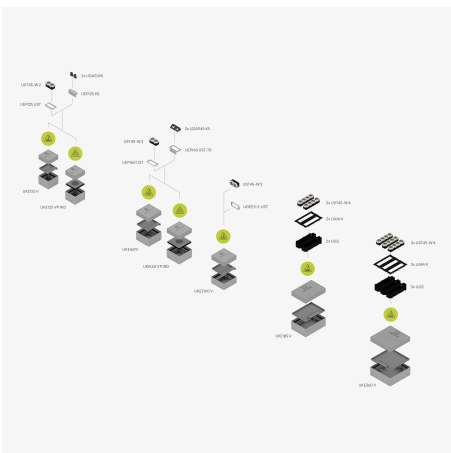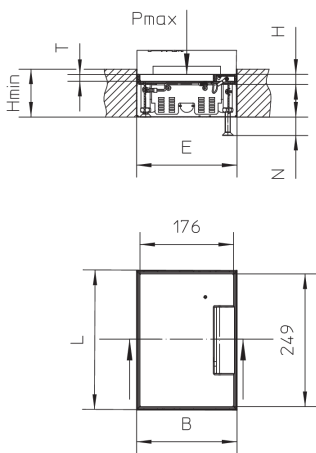

OPTIONALES ZUBEHÖR

UG3, UKENP 185

DIN

Load requirements according to: DIN EN 50085

