

UKEF160 V



Stainless steel hinged cover compact single outlet, 4-way, angular, flat

UKEF160 V are hinged cover compact single outlets consisting of a floor socket, a height-adjustable single outlet and a formwork body. The square components are inserted directly into the screed and are used to accommodate up to two installation devices. In addition, M25 pipes can be routed through the perforated side walls of the floor socket. The single outlets are made of stainless steel (V2A) and are suitable for use in dry-cleaned and damp-cleaned rooms with office traffic loads. They are available with installation dimensions of 166 x 166 mm.



Artikel	Typ	H	H _{min}	B	L	N	P _{max}	E	IP _g	IP _n	W
UKEF160 15-V E	Dummy single-outlet cartridge,	19 mm	70 mm	160 mm	160 mm	20 mm	2.00 kN	166 x 166 mm	IP 20	IP 30	2.025 kg

DETAIL- UND ANWENDUNGSBILDER

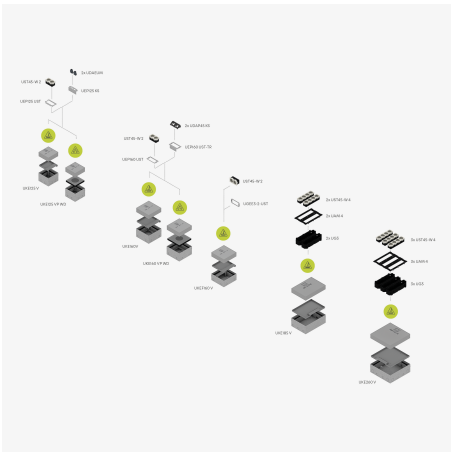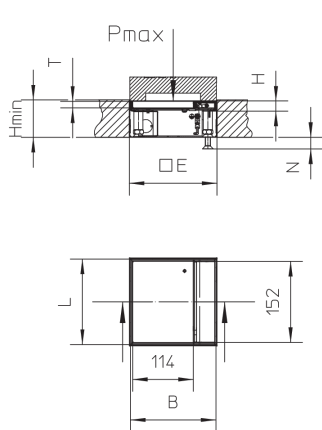

OPTIONALES ZUBEHÖR

UKENP 160



DIN

Load requirements according to: DIN EN 50085

