


UM
Mounting sleeve


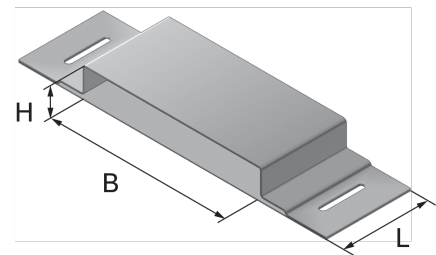


The UM component is a fixing sleeve that is placed between the duct sections when installing underfloor duct. The sleeves are used in expansion joints in raw concrete slabs and also to seal joints. They are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346. Additional accessories are optionally available.

Artikel	Typ	H	B	L	W
UM 28-190S	mounting sleeve UM 28-190S, H=28mm,	28 mm	194 mm	82 mm	0.536 kg
UM 28-250S	mounting sleeve UM 28-250S,	28 mm	254 mm	82 mm	0.630 kg
UM 28-350S	mounting sleeve UM 28-350S,	28 mm	354 mm	82 mm	0.786 kg
UM 38-190S	mounting sleeve UM 38-190S,	38 mm	194 mm	82 mm	0.548 kg
UM 38-250S	mounting sleeve UM 38-250S,	38 mm	254 mm	82 mm	0.642 kg
UM 38-350S	mounting sleeve UM 38-350S,	38 mm	354 mm	82 mm	0.814 kg
UM 48-190S	mounting sleeve UM 48-190S,	48 mm	194 mm	82 mm	0.535 kg
UM 48-250S	mounting sleeve UM 48-250S,	48 mm	254 mm	82 mm	0.662 kg
UM 48-350S	mounting sleeve UM 48-350S,	48 mm	354 mm	82 mm	0.822 kg

DETAIL- UND ANWENDUNGSBILDER



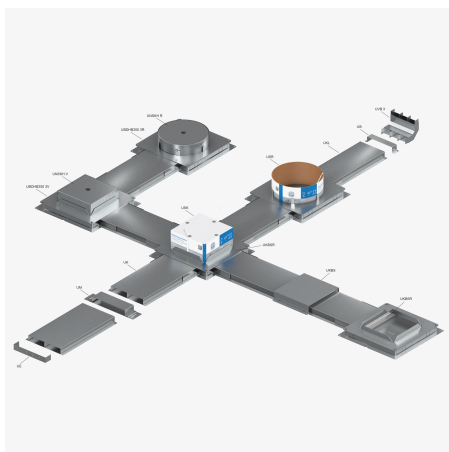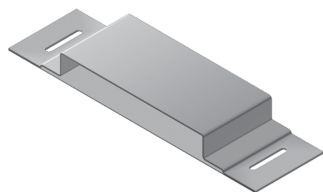

OPTIONALES ZUBEHÖR

UN

