


UNE 305R




Dummy cover, 3x, round

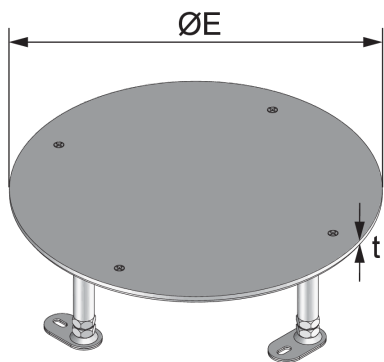

UNE 305R components are round dummy covers. These height-adjustable covers are protective covers for cartridge installation units with a maximum of three mounting boxes in UBDHB floor sockets and raised or false floor openings. The units are suitable for dry-cleaned rooms with office traffic loads. The products from the underfloor systems range are made of sendzimir hot-dip galvanised sheet steel 4 mm thick and have a max. load capacity of 2 kN. The dummy covers have installation dimensions of 307 mm and a minimum installation height of 90 mm.

Artikel	Typ	H	H _{min}	N	t	P _{max}	E	W
UNE 305R-90S	levelling unit UNE 260V-100S,	4 mm	90 mm	55 mm	4.00 mm	2.00 kN	307 mm	3.253 kg

DETAIL- UND ANWENDUNGSBILDER

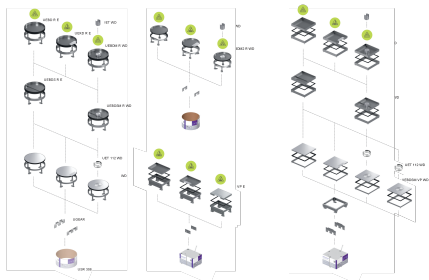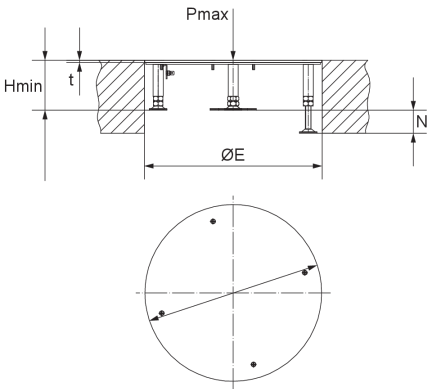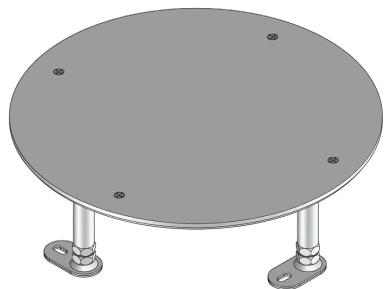

Load requirements according to: DIN EN 50085

