UNE 305R

Dummy cover, 3x, round

UNE 305R components are round dummy covers. These height-adjustable covers are protective covers for cartridge installation units with a maximum of three mounting boxes in UBDHB floor sockets and raised or false floor openings. The units are suitable for dry-cleaned rooms with office traffic loads. The products from the underfloor systems range are made of sendzimir hot-dip galvanised sheet steel 4 mm thick and have a max. load capacity of 2.00 kN. The dummy covers have installation dimensions of 307 mm and a minimum installation height of 90 mm.

VDE tested according to: DIN EN 50085-2-2

CE-Zeichen (Conformité Européenne): Ja

VDE-zertifiziert: Ja

Article	H	H_{min}	N	t	D	P_{max}	ØE	G
UNE 305R-90S levelling unit UNE 260V-100S,	4 mm	90 mm	55 mm	4.00 mm	305 mm	2.00 kN	307 mm	3.253 kg

H: height
H_{min}: minimum installation height
N: levelling range
t: material thickness
D: Diameter (mm)
P_{max}: maximum load
ØE: fitting dimension round
G: Weight per storage unit

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved

DETAIL AND APPLICATION IMAGES

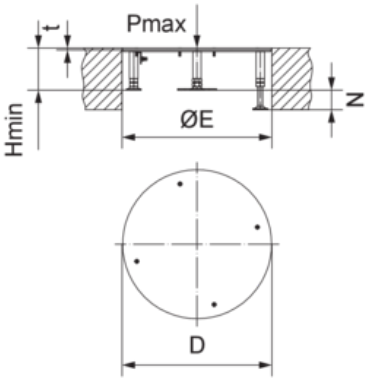

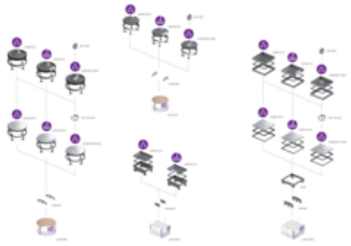

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Phone: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Issue date: 17.11.2026. Errors and technical changes reserved