


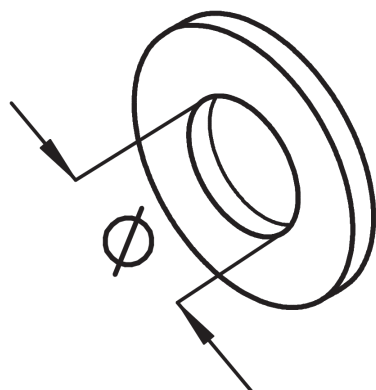

US125

Washer, DIN EN ISO 7089

The US125 washer is a versatile accessory, but is mainly used for channel-bolt connections. For example, a hot-rolled profile in combination with a hook-head t-bolt and washer requires the use of high tightening torques. The washer also ensures steel-to-steel contact between the attachment part and the anchor channel. It is also used for clamp connections, clamping claws and pressure bolts. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	t	D	Ø	W
US 10X21F	Washer US 10x21F	2.00 mm	20 mm	10.5 mm	0.003 kg
US 13X24F	Washer US 13x24F	2.50 mm	24 mm	13 mm	0.005 kg
US 17X30F	Washer US 17x30F	3.00 mm	30 mm	17 mm	0.011 kg

Artikel	Typ	t	D	Ø	W
US 10X21	Washer US 10x21	2.00 mm	20 mm	10.5 mm	0.003 kg
US 13X24	Washer US 13x24	2.50 mm	24 mm	13 mm	0.005 kg
US 17X30	Washer US 17x30	3.00 mm	30 mm	17 mm	0.009 kg
US 6X12	Washer US 6x12	1.60 mm	12.5 mm	6.4 mm	0.001 kg
US 8X17	Washer	2.00 mm	16 mm	8.4 mm	0.001 kg

Artikel	Typ	t	D	Ø	W
US 10X21E	Washer US 10x21E	2.00 mm	20 mm	10.5 mm	0.003 kg
US 13X24E	Washer US 13x24E	2.50 mm	24 mm	13 mm	0.005 kg
US 6X12E	Washer US 6x12E	1.50 mm	12.5 mm	6.4 mm	0.001 kg
US 8X17E	Washer US 8x17E	1.50 mm	16 mm	8.4 mm	0.001 kg



Artikel	Typ	t	D	Ø	W
US 10X21E4	Washer US 10x21E	2.00 mm	20 mm	10.5 mm	0.002 kg
US 6X12E4	Washer,	1.50 mm	12.5 mm	6.4 mm	0.001 kg
US 8X17E4	Washer US 8x17E4	1.50 mm	16 mm	8.4 mm	0.001 kg

DETAIL- UND ANWENDUNGSBILDER

