


USK

Shuttering unit, angular

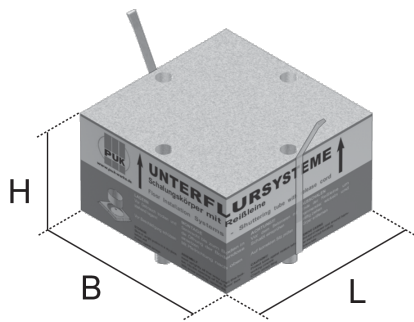

The products USK are square formwork bodies that are inserted into screed-covered underfloor ducts. The hollow bodies are installed in UBDHB false floor sockets or in UKDA assembly covers as lost formwork. After being inserted into the opening of the cover plate, they form solid units with the floor sockets. The pipes are removed again after the screed has hardened using an integrated ripcord. The formwork bodies are made of plastic-coated airopop® (polystyrene) and are free of hexabromocyclododecane (HBCD). They are available in heights of 150 and 225 mm and measure 163 and 163 mm across.

Artikel	Typ	H	B	L	E	W
USK 160V-150	shuttering unit, LxW=164x164mm, H=150mm,	150 mm	163 mm	163 mm	165 x 165 mm	0.082 kg
USK 185V-150	shuttering unit, LxW=186x262mm, H=150mm,	150 mm	262 mm	186 mm	187 x 262 mm	0.146 kg
USK 259V-150	shuttering unit, LxW=262x262mm, H=150mm,	150 mm	262 mm	262 mm	262 x 262 mm	0.167 kg
USK 259V-225	shuttering unit, LxW=262x262mm, H=225mm,	225 mm	262 mm	262 mm	262 x 262 mm	0.220 kg

DETAIL- UND ANWENDUNGSBILDER

